

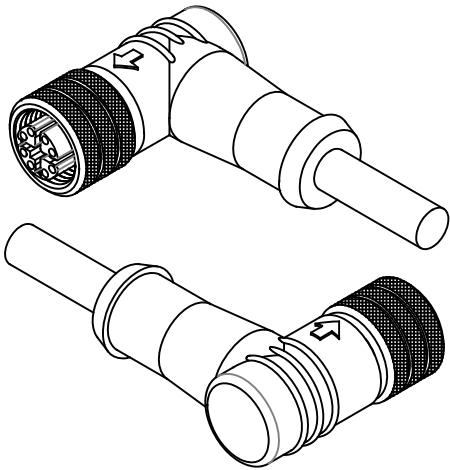


RoHS

REV.	DESCRIPTION	DATE
A	ISSUE	Sep/22/2024

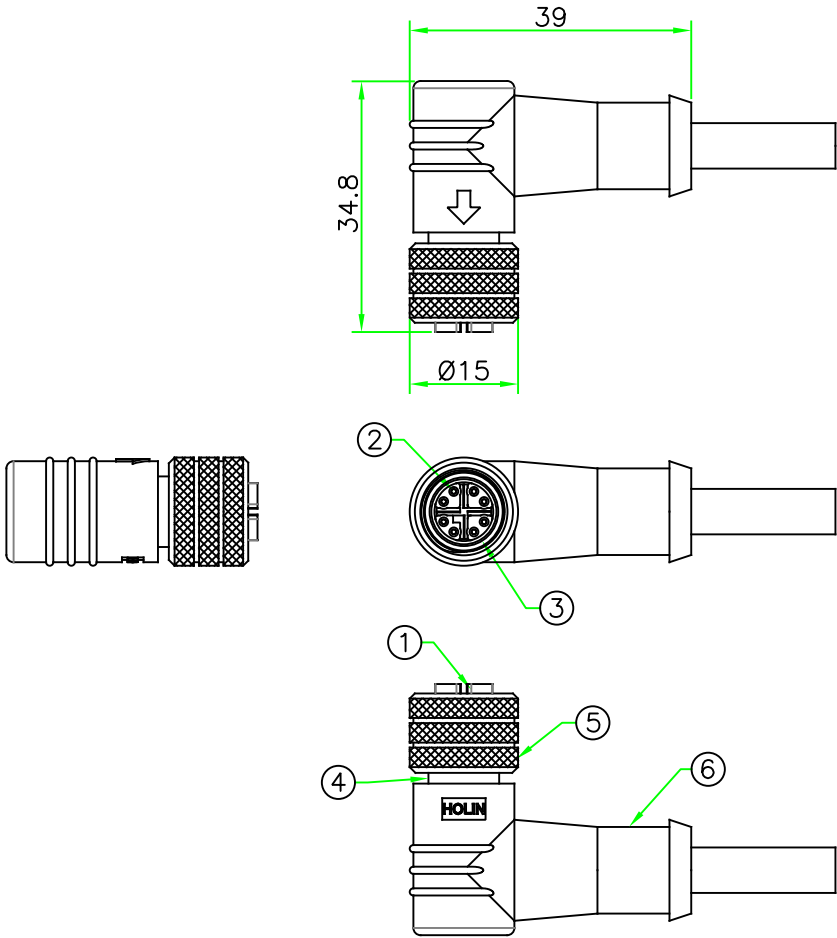


NOTES:  
1. ELECTRICAL CHARACTERISTICS:  
CURRENT RATING : 0.5 A  
RATED VOLTAGE : 48 V  
INSULATION RESISTANCE :  $\geq 100M \Omega$   
TEMPERATURE RANGE: -25°C TO +85°C  
DIELECTRIC WITHSTANDING VOLTAGE:  
500V AC FOR ONE MINUTE



PIN ASSIGNMENT  
FRONT VIEW  
(前視圖)

※Cable specification and length can be customized.

						HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司			
6	OVERMOLD	PU or PVC.	BLACK	1	202-135	 UNIT: mm	TITLE : M12 X-Coding Female Connector Shielded R/A Molded Cable Ass'y		
5	RING NUT	BRASS , Nickel Plated.	BLACK	1					
4	METAL SHELL	BRASS , Nickel Plated.		1		SCALE 1:1	P/N: X12I-S208RN	DR. JAMES	CH. ERIC
3	O-RING	VITON.	BLACK	1					
2	CONTACT	BRASS , 6u" Gold Plated. Female Contact.		8		UNLESS OTHERWISE SPECIFIED TOLERANCES: .X ± 1.0 .XX ± 0.5 .XXX ± 0.25 ANGLE ± 1°	DWG.NO: X12I-S208RN	AP.	
1	CONNECTOR	M12 X-Coding Female Connector Insert. Nylon+GF.	BLACK	1					
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS	REV. A	SHEET 1/1		