
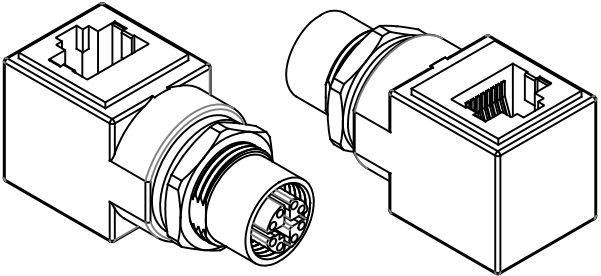



RoHS

REV.	DESCRIPTION	DATE
A	ISSUE	Dec/14/2023

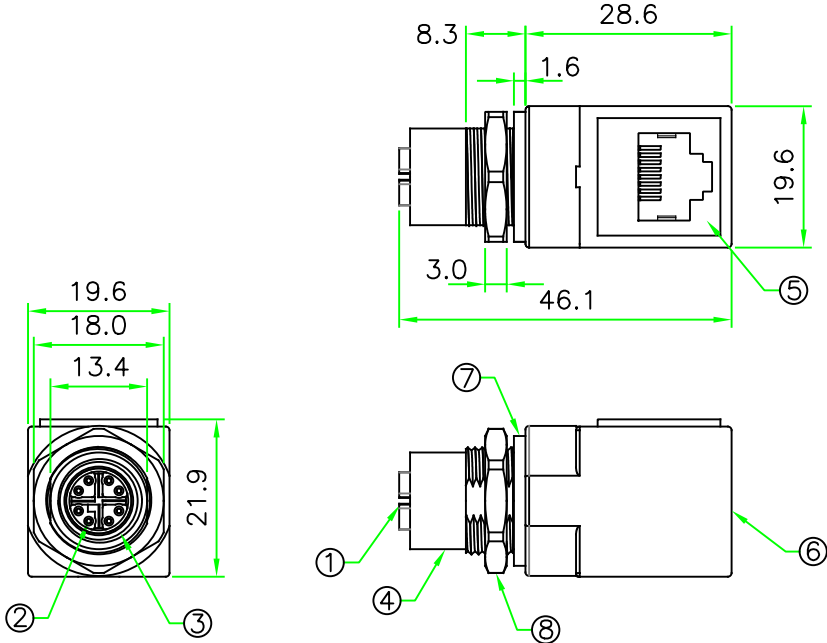


WIRING DIAGRAM

M12X-8F	RJ45 JACK
1	1
2	2
3	3
4	6
5	7
6	8
7	5
8	4
Shell	Shell



PIN ASSIGNMENT FRONT VIEW
(前視圖)

8	HEX NUT	BRASS. Nickel Plated.		1		HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司			
7	GASKET	EPDM.	BLACK	1					
6	OVERMOLD	PU.	BLACK	1		 UNIT: mm TITLE : M12 X-Coding 8P Female to RJ45 8P8C Jack Adapter			
5	CONNECTOR	RJ45 8P8C JACK.		1					
4	METAL BODY	BRASS. Nickel Plated.		1		SCALE 1:1			
3	O-RING	VITON.	BLACK	1					
2	CONTACT	BRASS. 6u" Gold Plated. Female Pin.		8		UNLESS OTHERWISE SPECIFIED TOLERANCES: XX. ±1.0 .X ±1.0 .XX ±0.5 .XXX ±0.25 ANGLE ± 1°			
1	CONNECTOR	M12 X-Coding Female 8 Pin Connector Insert.Nylon+GF.	BLACK	1					
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS	REV. A	SHEET 1/1	P/N: X12RJL-MFF88	DR. James CH. Eric
								DWG.NO: X12RJL-MFF88	AP.