
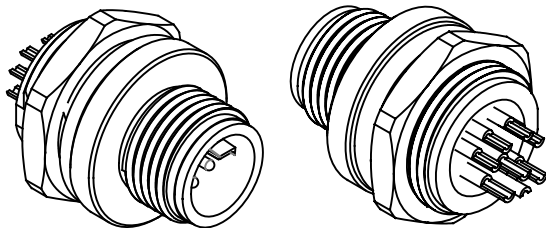

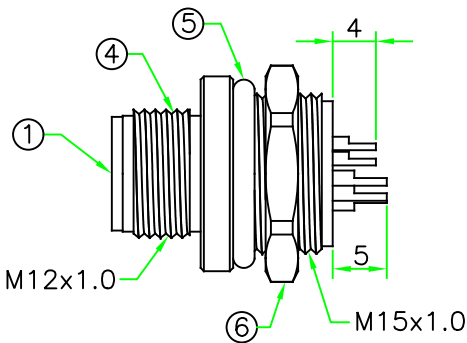




Recommended
Panel Cut-Out

RoHS

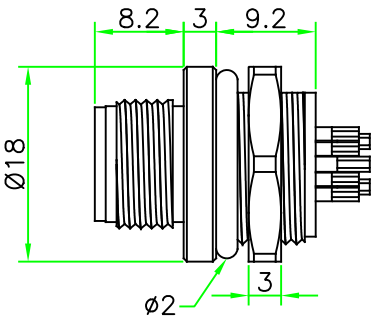

NOTES:

1. ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 6A
VOLTAGE RATING : 50V a.c. or d.c.
TEMPERATURE RANGE: -25°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
2. PANEL THICKNESS MAX. 3.0mm



Pin Assignment
Front View
(前視圖)

7	GLUE	Epoxy.	BLACK	1	
6	HEX NUT	BRASS, Nickel Plated.		1	
5	O-RING	SILICON.	RED	1	
4	METAL BODY	BRASS, Nickel Plated.		1	
3	CONTACT	BRASS , 6 u" Gold Plated . Male Contact.		4	
2	CONTACT	BRASS , 6 u" Gold Plated . Male Contact.		4	
1	CONNECTOR	M12 Y-Coding Male Connector Insert.NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司				
	UNIT: mm	TITLE : M12 Y-Coding Male Panel Connector Frontr Mount Circular Flange With Solder Bucket Pin		
SCALE	1.5:1			
UNLESS OTHERWISE SPECIFIED TOLERANCES: XX. ± 1.0 .X ± 1.0 .XX ± 0.5 .XXX ± 0.25 ANGLE ± 1°		P/N:	Y12DI-M144CSF	DR. James
REV. A		SHEET	1/1	CH. Eric
		DWG.NO:	Y12DI-M144CSF	AP.