


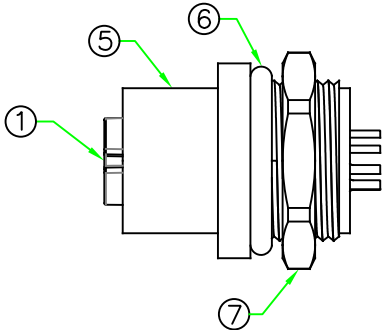



Recommended
Panel Cut-Out


RoHS

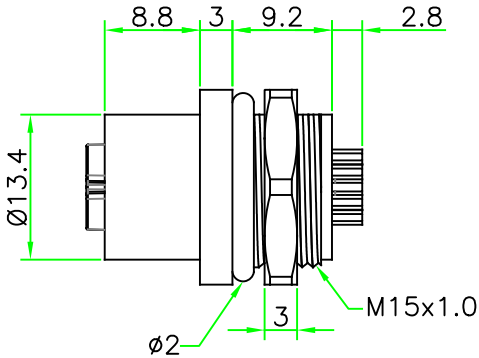

REV.	DESCRIPTION	DATE
A	ISSUE	Nov/03/2024

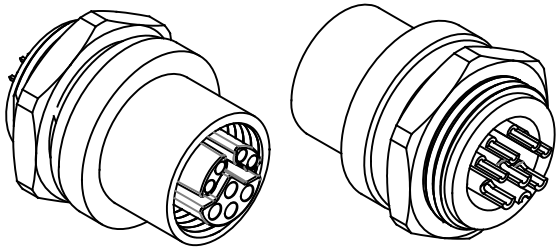

- NOTES:
- ELECTRICAL CHARACTERISTICS:
CURRENT RATING :
0.5A (4 Pin Data Contacts) (Pin 1 ~ Pin 4)
6A (4 Pin Power Contacts) (Pin 5 ~ Pin 8)
VOLTAGE RATING : 50V a.c. or d.c
TEMPERATURE RANGE: -25°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
 - PANEL THICKNESS MAX. 3.0mm



Pin Assignment
Front View
(前視圖)

8	GLUE	Epoxy.	BLACK	1		HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司			
7	HEX NUT	BRASS, Nickel Plated.		1		TITLE M12 Y-Coding Female Panel Connector Front Mount Circular Flange With Solder Bucket Pin			
6	O-RING	SILICON.	RED	1					
5	METAL BODY	BRASS, Nickel Plated.		1		P/N: Y12DI-M244CSF			
4	O-RING	VITON.	BLACK	1					
3	CONTACT	BRASS , 6 u" Gold Plated . Female Contact.		4		DR. James			
2	CONTACT	BRASS , 6 u" Gold Plated . Female Contact.		4					
1	CONNECTOR	M12 Y-Coding Female Connector Insert.NYLON+GF.	BLACK	1		CH. Eric			
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS				
						AP.			