

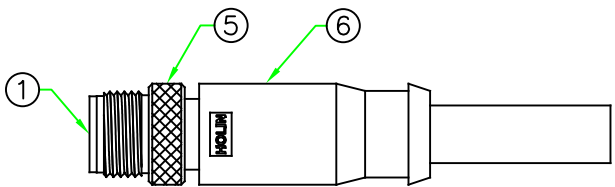



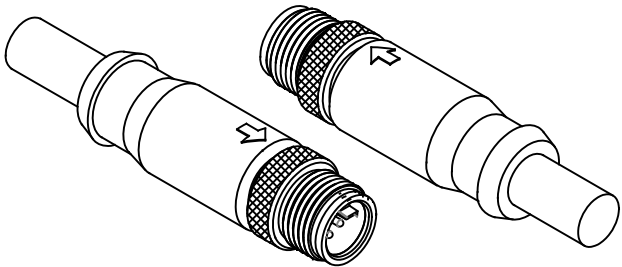



RoHS

REV.	DESCRIPTION	DATE
A	ISSUE	Jun/30/2023

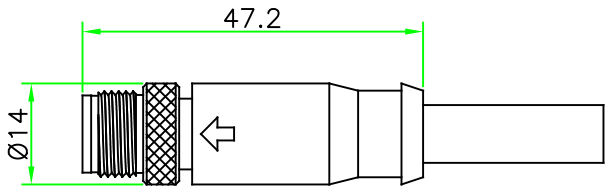

Notes:
1. Electrical Characteristics :
Current Rating :
0.5A (4 Pin Data Contacts) (Pin 1 ~ Pin 4)
6A (4 Pin Power Contacts) (Pin 5 ~ Pin 8)
Voltage Rating : 50V a.c. or d.c.
Temperature Range : -25°C TO +85°C
Dielectric Withstanding Voltage :
500V AV For One Minute.

Front View (前視圖)						HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
6	OVERMOLD	PU or PVC.	BLACK	1	98-135		UNIT: mm	TITLE : M12 Y-Coding Male Shield Molded Cable			
5	RING NUT	BRASS, Nickel Plated.		1			SCALE				1:1
4	CONTACT	BRASS , 6 u" Gold Plated. Male Contact. (Data)		4		UNLESS OTHERWISE SPECIFIED TOLERANCES: XX. ± 1.0 .X ± 1.0 .XX ± 0.5 .XXX ± 0.25 ANGLE ± 1°	P/N: Y12DI-S144SN	DR. James			
3	CONTACT	BRASS , 6 u" Gold Plated. Male Contact. (Power)		4							
2	CONNECTOR	M12 Y-Coding Male Connector Insert. Nylon+GF.	BLACK	1				REV. A	SHEET 1/1	DWG.NO: Y12DI-S144SN	
1	METAL SHELL	BRASS, Nickel Plated.		1							
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS						