
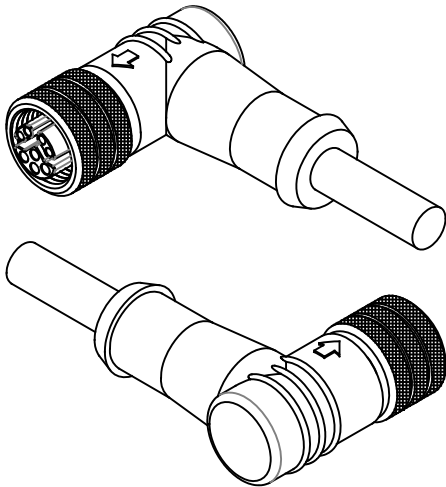



RoHS

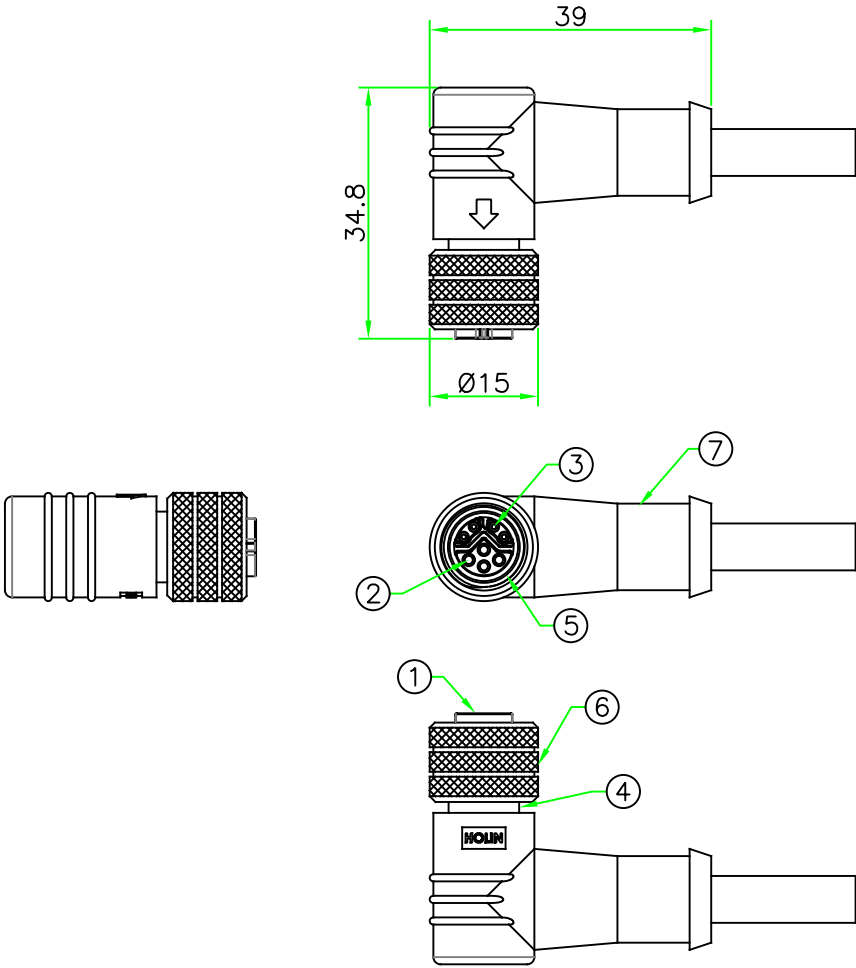

Notes:
1. Electrical Characteristics :
Current Rating :
0.5A (4 Pin Data Contacts) (Pin 1 ~ Pin 4)
6A (4 Pin Power Contacts) (Pin 5 ~ Pin 8)
Voltage Rating : 50V a.c. or d.c.
Temperature Range : -25°C TO +85°C
Dielectric Withstanding Voltage :
500V AV For One Minute.

7	OVERMOLD	PU or PVC.	BLACK	1	202-135
6	RING NUT	BRASS, Nickel Plated.		1	
5	O-RING	VITON.	BLACK	1	
4	METAL SHELL	BRASS, Nickel Plated.		1	
3	CONTACT	BRASS , 6 u" Gold Plated. Female Contact. (Data)		4	
2	CONTACT	BRASS , 6 u" Gold Plated. Female Contact. (Power)		4	
1	CONNECTOR	M12 Y-Coding Female Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
	UNIT: mm	TITLE : M12 Y-Coding Female Shielded Connector Right Angle Molded Cable			
SCALE	1:1				
UNLESS OTHERWISE SPECIFIED TOLERANCES: .XX ± 1.0 .X ± 1.0 .XX ± 0.5 .XXX ± 0.25 ANGLE ± 1°		P/N: Y12DI-S244RN		DR. James	
REV. A		SHEET 1/1		CH. Eric	
		DWG.NO: Y12DI-S244RN		AP.	