
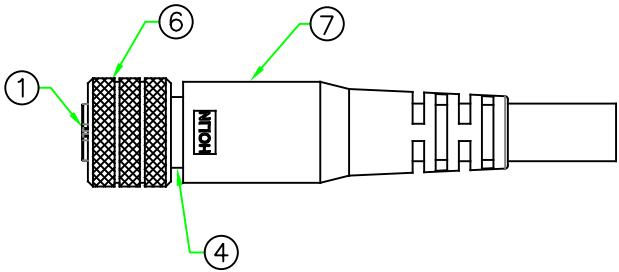


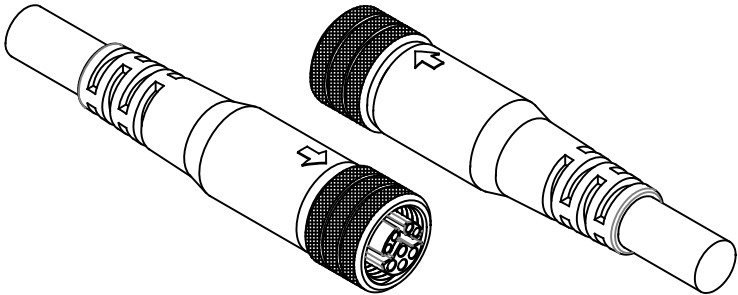


RoHS

REV.	DESCRIPTION	DATE
A	ISSUE	Sep/11/2024

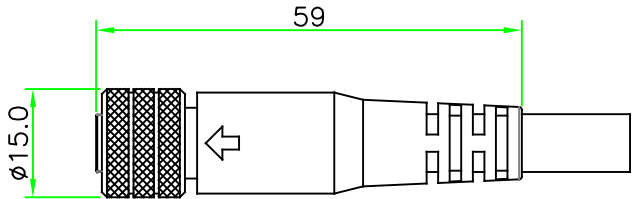

Pin Assignment
Front View
(前視圖)

Notes:
1. Electrical Characteristics :
Current Rating :
0.5A (4 Pin Data Contacts) (Pin 1 ~ Pin 4)
6A (4 Pin Power Contacts) (Pin 5 ~ Pin 8)
Voltage Rating : 50V a.c. or d.c.
Temperature Range : -25°C TO +85°C
Dielectric Withstanding Voltage :
500V AV For One Minute.

(前視圖)							HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司				
7	OVERMOLD	PU or PVC.	BLACK	1	98-135-N7		UNIT: mm	TITLE : M12 Y-Coding Female Shield Molded Cable			
6	RING NUT	BRASS, Nickel Plated.		1			SCALE			1:1	
5	O-RING	VITON.	BLACK	1		UNLESS OTHERWISE SPECIFIED TOLERANCES: XX. ± 1.0 .X ± 1.0 .XX ± 0.5 .XXX ± 0.25 ANGLE ± 1°		P/N: Y12DI-S244SM		DR. James	
4	METAL SHELL	BRASS, Nickel Plated.		1						CH. Eric	
3	CONTACT	BRASS , 6 u" Gold Plated. Female Contact. (Data)		4		REV. A		SHEET 1/1		DWG.NO: Y12DI-S244SM	AP.
2	CONTACT	BRASS , 6 u" Gold Plated. Female Contact. (Power)		4							
1	CONNECTOR	M12 Y-Coding Female Connector Insert. Nylon+GF.	BLACK	1							
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS						