








RoHS 機密文件

Ø5.0±0.05

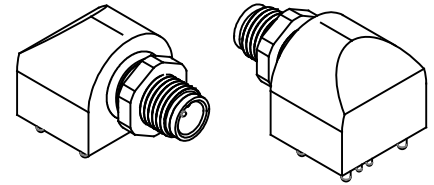

Recommended
Panel Cut Out



NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 1A

RATED VOLTAGE: 60V d.c. or a.c.

TEMPERATURE RANGE: -25°C TO +85°C





DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

2. HOW TO ORDER: A05I-M1xxCPRR

03 - 3 PINS

04 - 4 PINS



PCB LAYOUT

A05I-M103CPRR

A05I-M104CPRR

PIN ASSIGNMENT FRONT VIEW(前視圖)



7	HEX NUT	BRASS , Nickel Plated.		1	M5-HNUT
6	O-RING	VITON.	BLACK	1	O-0410-VK01
5	HOLDER	Nylon+GF.	BLACK	1	
4	METAL SHELL	BRASS , Nickel Plated.		1	BM05FCRL11-01
3	CONTACT	BRASS , 6 u" Gold Plated . Male Contact.		N	PM0.48PL21.48-011
2	CONTACT	BRASS , 6 u" Gold Plated . Male Contact.		2	PM0.48PL18.98-011
1	CONNECTOR	M5 A-Coding 4P Male Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

	UNIT: mm	TITLE	M5 A-Coding Male Connector Right Angle Rear Mount With PCB mount Pin
SCALE	1.5:1	P/N:	A05I-M1xxCPRR
UNLESS OTHERWISE SPECIFIED TOLERANCES: XX, ± 0.5 .X ± 0.5 .XX ± 0.25 .XXX ± 0.1 ANGLE ± 1°	REV.	DWG.NO:	A05I-M1xxCPRR
A	SHEET 1/1	DR.	SIBYL
		CH.	JAMES
		AP.	