

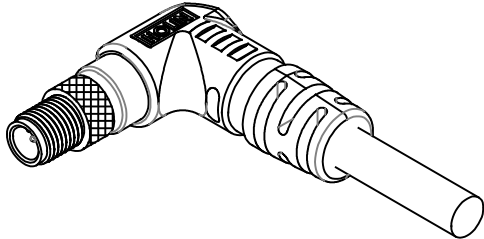


RoHS

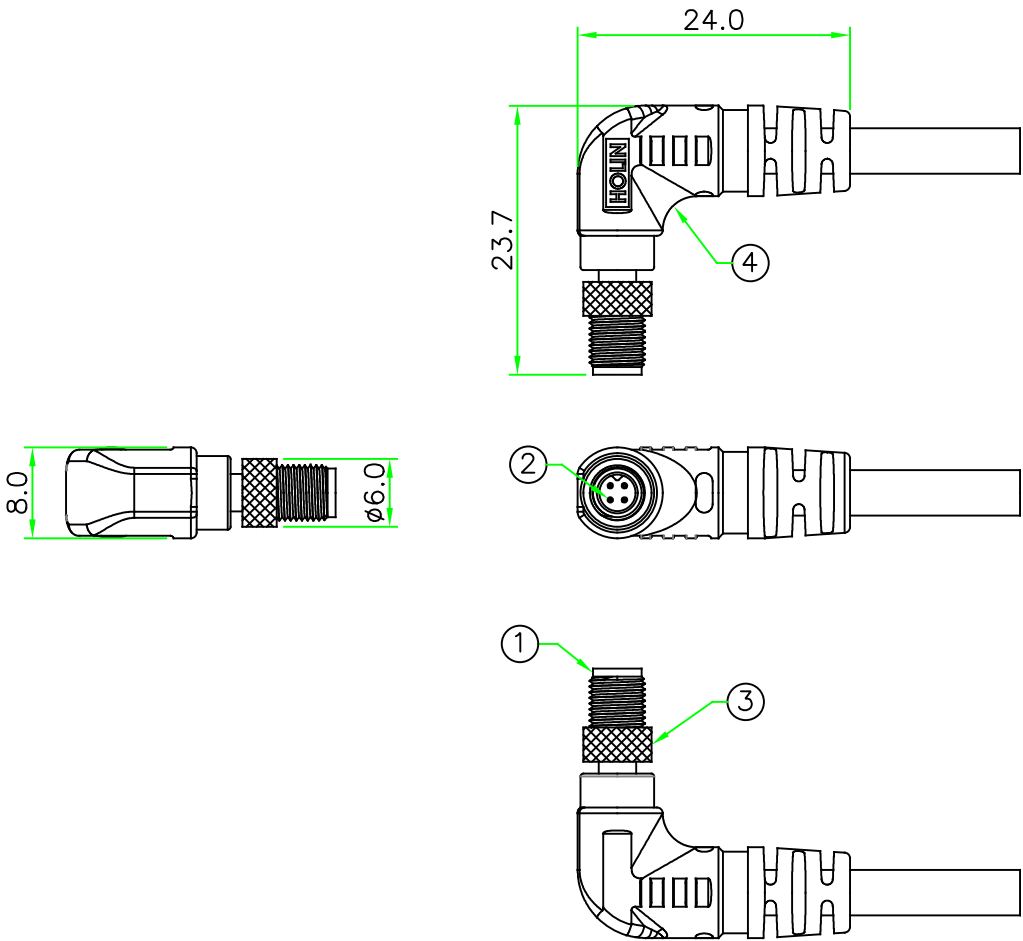

- NOTES:
- ELECTRICAL CHARACTERISTICE:
- 1. CURRENT RATING:1A.
 - 2. TEMPERATURE RANGE:-20°C~80°C
 - 3. DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
 - 4. HOW TO ORDER:A05I-M1xxRM
- └ 03-3 PINS
04-4 PINS

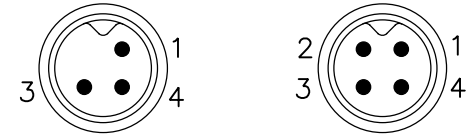

A05I-M103RM A05I-M104RM
PIN ASSIGNMENT FRONT VIEW
(前視圖)

※Cable specification and length can be customized.

4	OVERMOLD	PVC or PU.	BLACK	1	M5-0003-01
3	RING NUT	Brass, Nickel Plated.		1	M5M-RN
2	CONTACT	Brass , 6 u" Gold Plated. Male Contact.		N	M0.48SPL13.5
1	CONNECTOR	M5 A-Coding Male Connector Insert. Nylon+GF.	BLACK	1	M05A-CMxx
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
UNIT: mm		TITLE : M5 A-Coding Male R/A Molded Cable Ass'y			
SCALE		1.5:1		P/N: A05I-M1xxRM	
UNLESS OTHERWISE SPECIPED TOLERANCES: XX, ±1.0 .X ±1.0 .XX ±0.5 .XXX ±0.25 ANGLE ± 1°		REV. A		SHEET 1/1	
DWG.NO: A05I-M1xxRM		DR. SIBYL		CH. JAMES	
		AP.			