

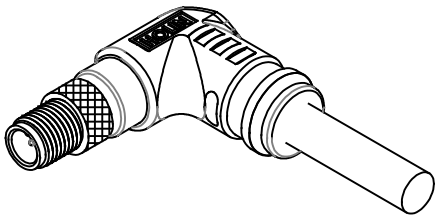



RoHS

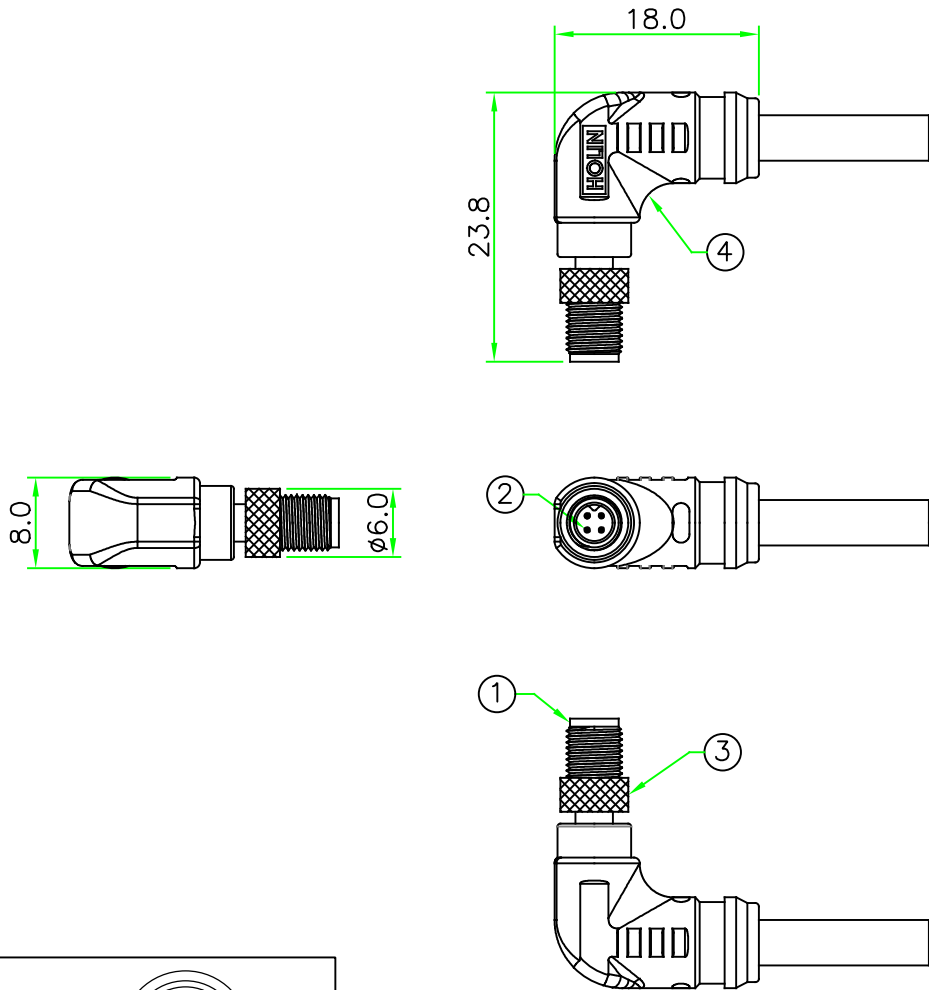

- NOTES:
- ELECTRICAL CHARACTERISTICE:
1. CURRENT RATING:1A.
 2. TEMPERATURE RANGE:-20°C~80°C
 3. DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
 4. HOW TO ORDER:A05I-M1xxRN
└ 03-3 PINS
04-4 PINS



A05I-M103RN



A05I-M104RN

PIN ASSIGNMENT FRONT VIEW

(前視圖)

※Cable specification and length can be customized.

4	OVERMOLD	PVC or PU.	BLACK	1	M5-0002-01
3	RING NUT	Brass, Nickel Plated.		1	M5M-RN
2	CONTACT	Brass , 6 u" Gold Plated. Male Contact.		N	M0.48SPL13.5
1	CONNECTOR	M5 A-Coding Male Connector Insert. Nylon+GF.	BLACK	1	M05A-CMxx
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

	UNIT: mm	TITLE :
SCALE	1.5:1	M5 A-Coding Male R/A Molded Cable Ass'y
UNLESS OTHERWISE SPECIED TOLERANCES: XX, ±1.0 .X ±1.0 .XX ±0.5 .XXX ±0.25 ANGLE ± 1°		P/N:
REV. A		A05I-M1xxRN
SHEET 1/1		DR. SIBYL
DWG.NO: A05I-M1xxRN		CH. JAMES
		AP.