



RoHS 機密


REV.	DESCRIPTION	DATE
A	ISSUE	Oct/07/2025

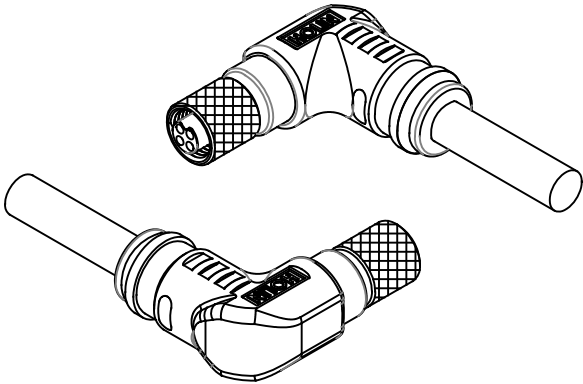

- NOTES:
- ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 1A
CONNECTOR TEMPERATURE RANGE: -20°C TO +80°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
 - HOW TO ORDER: A05I-M2xxRN
03 - 3 PINS
04 - 4 PINS

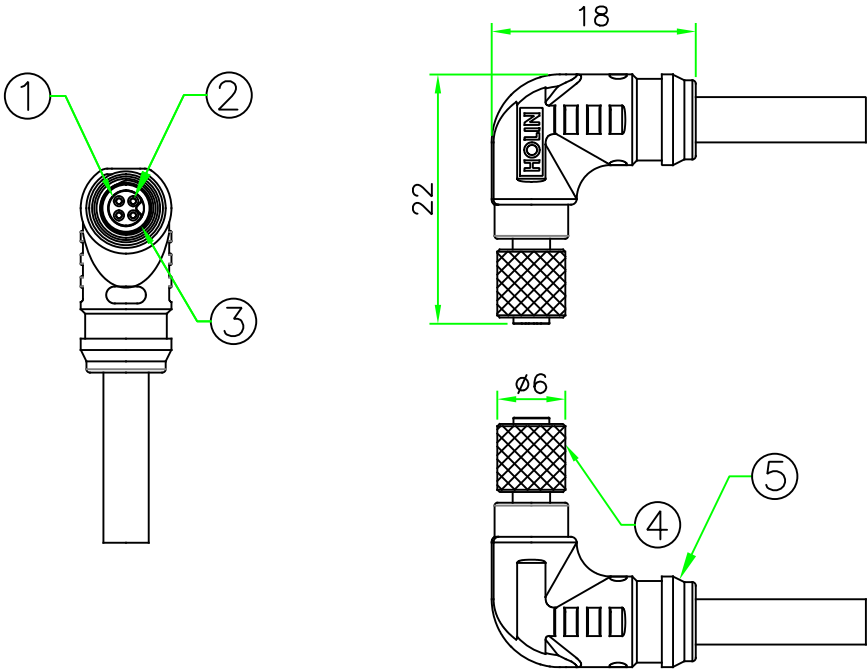

A05I-M203RN



A05I-M204RN

Pin Assignment Front View(前視圖)

5	OVERMOLD	PVC or PU.	BLACK	1	
4	RING NUT	Brass, Nickel Plated.		1	
3	O-RING	Viton.	BLACK	1	
2	CONTACT	Brass , 6 u" Gold Plated. Female Contact.		N	
1	CONNECTOR	M05 A-Coding Female Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
	UNIT: mm	TITLE : M5 A-Coding Female Molded Cable Ass'y			
SCALE	1.5:1	P/N: A05I-M2xxRN		DR.	RUBY
UNLESS OTHERWISE SPECIFIED TOLERANCES: XX, ±1.0 .X ±1.0 .XX ±0.5 .XXX ±0.25 ANGLE ± 1°		DWG.NO: A05I-M2xxRN		CH.	SIBYL
REV.	SHEET	AP.			
A	1/1				