
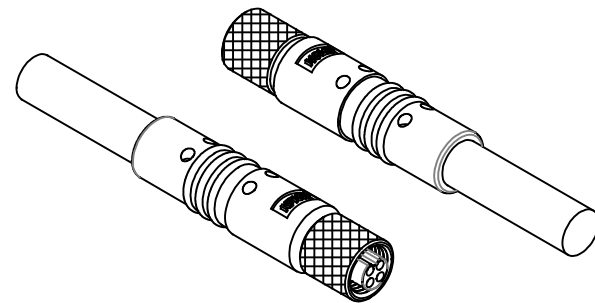


RoHS

REV.	DESCRIPTION	DATE
A	ISSUE (DI-11301045)	Jan/31/2024

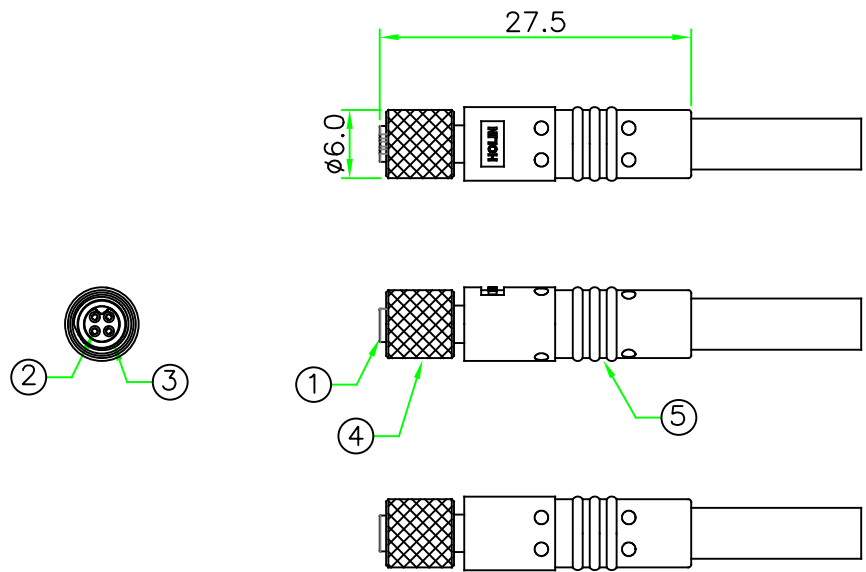


ELECTRICAL CHARACTERISTIC:

1. CURRENT RATING:1A.
2. TEMPERATURE RANGE:-20°C~80°C
3. DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
4. HOW TO ORDER:A05I-M2xxSN

03-3 PINS
04-4 PINS



A05I-M203SN



A05I-M204SN

PIN ASSIGNMENT FRONT VIEW

(前視圖)

*Cable specification and length can be customized.

No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS
5	OVERMOLD	PVC or PU.	BLACK	1	A05I-M20xSN-0001-x 181-135
4	RING NUT	Brass, Nickel Plated.		1	M5F-RN
3	O-RING	Viton.	BLACK	1	O-0205-VK01
2	CONTACT	Brass , 6 u" Gold Plated. Female Contact.		N	
1	CONNECTOR	M5 A-Coding Female Connector Insert. Nylon+GF.	BLACK	1	M05A-CFxx

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司			
	UNIT: mm	TITLE : M5 A-Coding Female Molded Cable Ass'y	
SCALE	1.5:1	P/N: A05I-M2xxSN	
UNLESS OTHERWISE SPECIFIED TOLERANCES: XX, ±1.0 .X ±1.0 .XX ±0.5 .XXX ±0.25 ANGLE ± 1'		DR. SIBYL	
REV.	SHEET	CH. JAMES	
A	1/1	AP.	
DWG.NO: A05I-M2xxSN			