



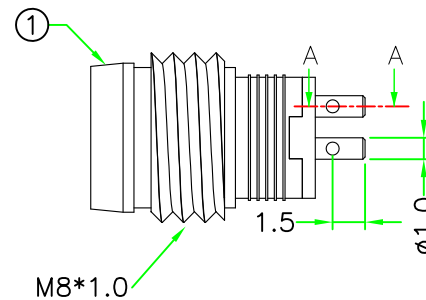

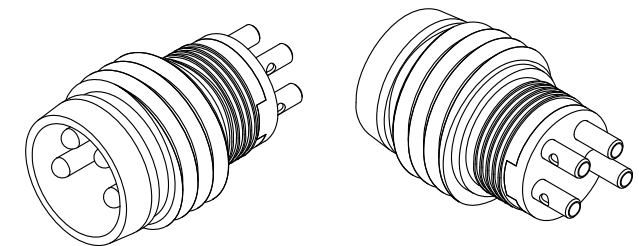


IP66~68

REV.	DESCRIPTION	DATE
A	Issue	Aug/11/2017

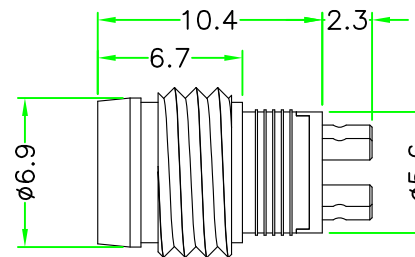

剖面圖 A-A

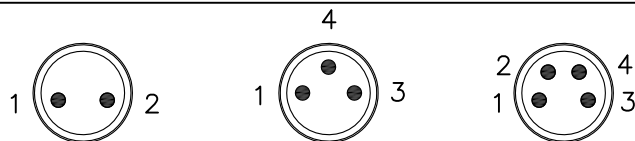

A08D-M102CS-L10.4 A08D-M103CS-L10.4 A08D-M104CS-L10.4

PIN ASSIGNMENT FRONT VIEW
(前視圖)

3	Contact	Brass, 6u" Gold Plated.		N	8MP-M1.0SPL12.4-B	UNLESS OTHERWISE SPECIFIED TOLERANCES:		P/N: A08D-M1xxCS-L10.4	DR. SIBYL
2	Connector Insert	Nylon+GF.	BLACK	1	49-135-N1	.X ± .025	.XX ± .01		CH. ERIC
1	Metal Housing	Brass, Nickel Plated.		1	8MCP-SHELL-A3	.XXX± .005	ANGLE ± 1°		
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS	REV. A	SHEET 1/1	DWG.NO: A08D-M1xxCS-L10.4	AP.