
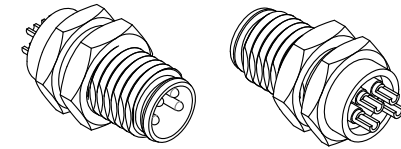
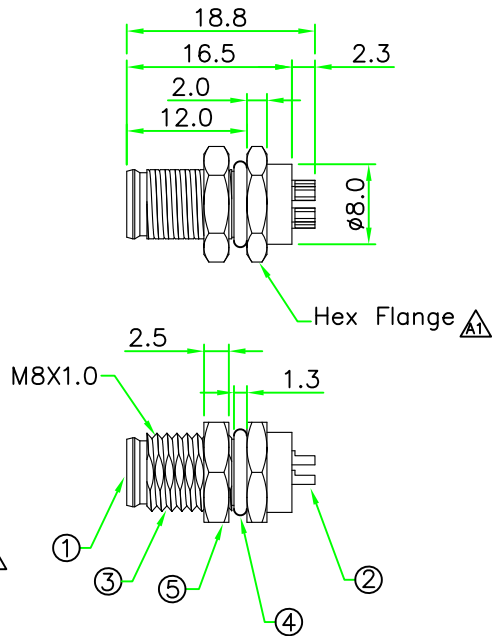


RoHS
IP67

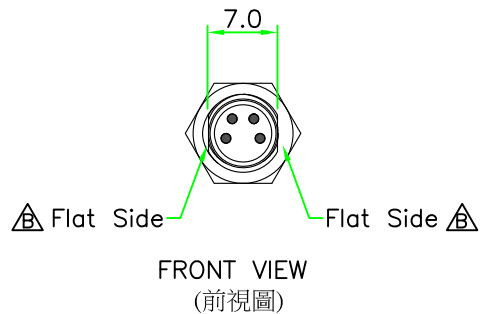


REV.	DESCRIPTION	DATE
A	ISSUE	Jun/20/2014
A1	Add 2 pin Spec.	Oct/24/2019
B	Change metal shell to two flat side.	May/06/2020

NOTES:

- ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 3A
TEMPERATURE RANGE: -25°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
- Panel Thickness Max. 5mm.
- HOW TO ORDER: A08D-M1xxHSR

② - 2 PINS
③ - 3 PINS
④ - 4 PINS

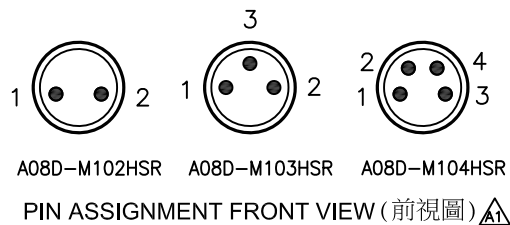

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司		TITLE M8 A-Coding Male Panel Connector Rear Mount Hex Flange With Solder Pin	
UNIT: mm	SCALE 1.5:1	P/N: A08D-M1xxHSR	DR. JAMES
UNLESS OTHERWISE SPECIFIED TOLERANCES: .X ± 0.5 .XX ± 0.25 .XXX ± 0.1 ANGLE ± 1°	REV. B	DWG.NO: A08D-M1xxHSR	CH. ERIC
SHEET 1/1			AP.

No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS
5	HEX NUT	Brass, Nickel Plated.		1	
4	O-RING	Silicon.	BLACK	1	
3	SHELL	Brass, Nickel Plated.		1	
2	CONTACT	Brass , 6 u" Gold Plated . Male Contact.		N	
1	CONNECTOR	M8 A-Coding Male Connector Insert. Nylon+GF.	BLACK	1	