
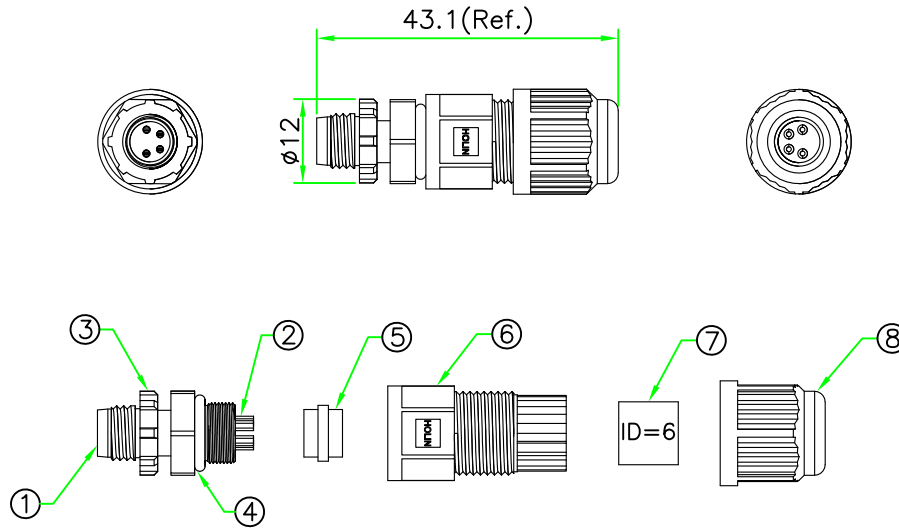


RoHS



REV.	DESCRIPTION	DATE
A	ISSUE	Aug/03/2022

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 3A

CONNECTOR TEMPERATURE RANGE: -40°C TO +105°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE



2. HOW TO ORDER: A08D-P1xxSA

02 - 2 PIN

03 - 3 PIN

04 - 4 PIN

#2 Zipper PE Bag.

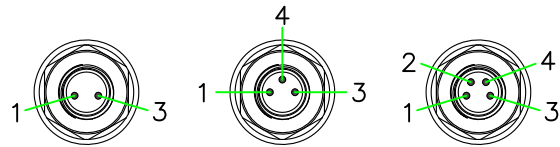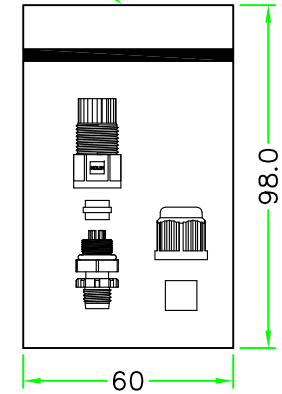

A08D-P102SA A08D-P103SA A08D-P104SA

PIN ASSIGNMENT FRONT VIEW (前視圖)

8	CLAMP NUT	NYLON.	BLACK	1	
7	SEAL TUBE	PLASTIC RUBBER. ID=6 mm.	BLACK	1	
6	HOOD	NYLON.	BLACK	1	
5	GASKET	PLASTIC RUBBER.	BLACK	1	
4	O-RING	VITON.	BLACK	1	
3	RING NUT	NYLON+GF.	BLACK	1	
2	CONTACT	BRASS. 6u" GOLD PLATED.		N	
1	CONNECTOR	M8 A-Coding MALE CONNECTOR INSERT. NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
		UNIT: mm	TITLE : M8 A-Coding All Plastic Female Connector Female Pin Field Installable Plug		
SCALE		1:1			
UNLESS OTHERWISE SPECIFIED TOLERANCES:					
xx. ±1.0					
.x ±1.0 .xx ±0.5					
.xxx ±0.25 ANGLE ± 1°					
REV.	A	SHEET	1/1	P/N: A08D-P1xxSA	
				DWG.NO: A08D-P1xxSA	DR. James
					CH. Eric
					AP.