






RECOMMENDED
PANEL CUT-OUT

REV.	DESCRIPTION	DATE
A	ISSUE	May/16/2022

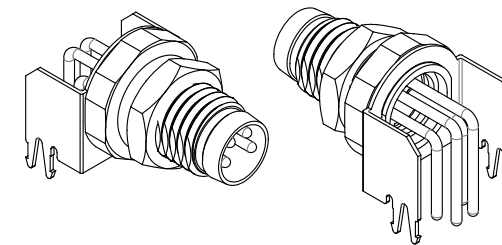


1. ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 3A
VOLTAGE RATING : 50V ac.c./60V d.c.
TEMPERATURE RANGE: -25°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
2. PANEL THICKNESS MAX. 4.0mm.
3. . PCB THICKNESS MAX. 1.6mm.
4. HOW TO ORDER: A08D-S1xxHPRR


- 02 - 2 PIN
- 03 - 3 PIN
- 04 - 4 PIN

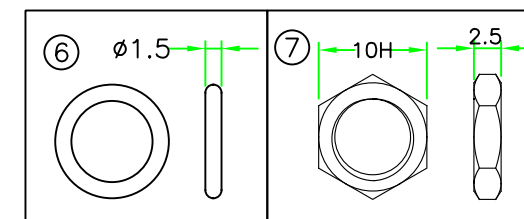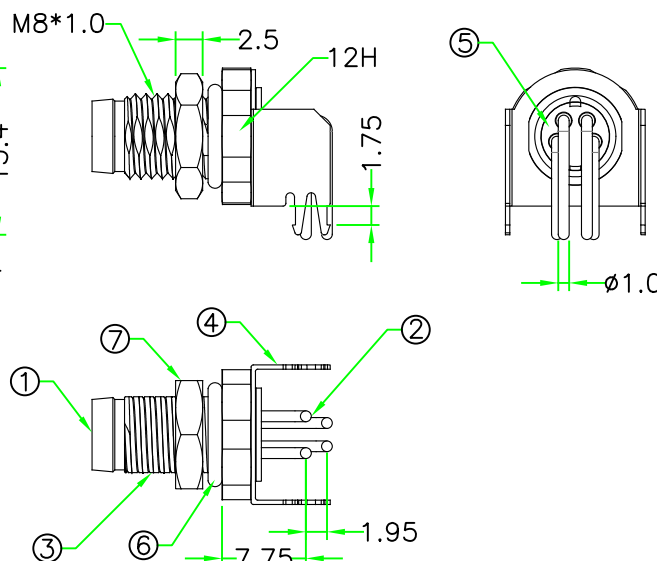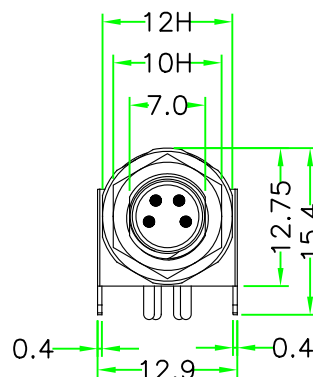


A08D-S102HPRR




A08D-S103HPRR



A08D-S104HPRR



PCB Layout

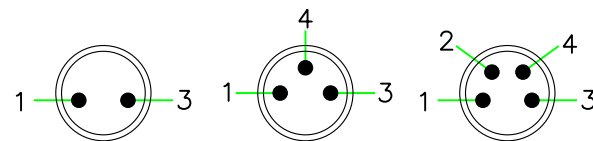

A08D-S102HPRR


A08D-S103HPRR

A08D-S104HPRR

PIN ASSIGNMENT FRONT VIEW (前視圖)

7	HEX NUT	BRASS. Nickel Plated.		1	
6	O-RING	Silicon.	BLACK	1	
5	GLUE	Epoxy.	BLACK	1	
4	SHIELD LUG	BRASS. Nickel Plated.		1	
3	METAL BODY	BRASS. Nickel Plated.		1	
2	CONTACT	BRASS, Male Pin. 6u" Gold Plated.		N	
1	CONNECTOR	M8 A-Coding Male Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN[®] HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司



- UNIT:mm

	1.5:1
--	-------

UNLESS OTHERWISE
SPECIFIED TOLERANCES:

XX, $\pm$ <u>0.5</u>	
.X $\pm$ <u>0.5</u>	.XX $\pm$ <u>0.25</u>
.XXX $\pm$ <u>0.1</u>	ANGLE $\pm$ 1°

REV.

SHEET

TITLE	M8 A-Coding 2~4 Pin Male Shielded R/A PCB Mount Connector
-------	--

P/N: A08D-S1xxHPRR

DR.	James
-----	-------

CH. Eric

DWG.NO:	A08D-S1xxHPRR
---------	---------------

AP.