
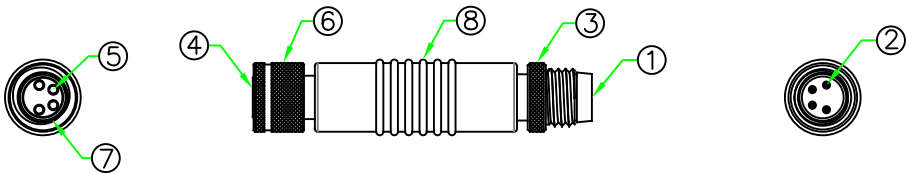
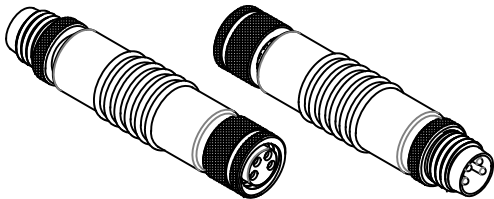


RoHS


REV.	DESCRIPTION	DATE
A	ISSUE	Oct/08/2024

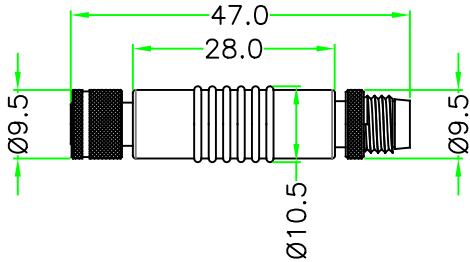


NOTES:

1. ELECTRICAL CHARACTERISTICS:
CURRENT RATING : 3A
VOLTAGE RATING : 50V a.c./60V d.c.
TEMPERATURE RANGE: -25°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
2. HOW TO ORDER: A08I-MFMxx

2 - 2 PINS
3 - 3 PINS
4 - 4 PINS
CONNECTOR GENDER

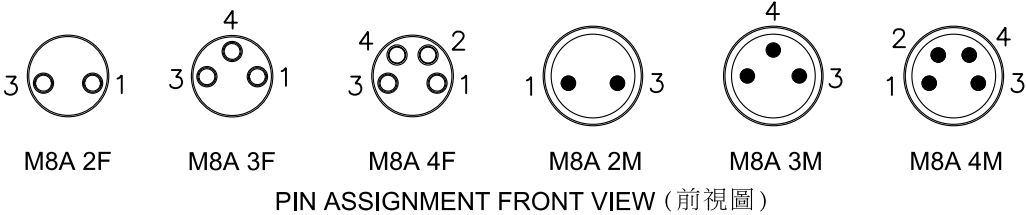

WIRING DIAGRAM



8	OVERMOLD	PU.	BLACK	1	D25 & D26	HOLIN® HTP ASIA TECHNOLOGY CO., LTD.					
7	O-RING	VITON.	BLACK	1		禾凌科技股份有限公司					
6	RING NUT	BRASS. Nickel Plated.		1			UNIT: mm	TITLE : M8 A-Coding Female to Male I-Adapter			
5	CONTACT	BRASS. 6u" Gold Plated . Female Pin.		N		SCALE	1:1				
4	CONNECTOR	M8 A-Coding Female Connector Insert. Nylon+GF.	BLACK	1		UNLESS OTHERWISE SPECIED TOLERANCES: xx. ±1.0 .x ±1.0 .xx ±0.5 .xxx ±0.25 ANGLE ± 1°		P/N:		A08I-MFMxx	DR. James
3	RING NUT	BRASS. Nickel Plated.		1							CH. Eric
2	CONTACT	BRASS. 6u" Gold Plated . Male Pin.		N				REV.		SHEET	DWG.NO:
1	CONNECTOR	M8 A-Coding Male Connector Insert. Nylon+GF.	BLACK	1							
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS	A	1/1				