




RoHS

REV.	DESCRIPTION	DATE
A	ISSUE	Oct/01/2025

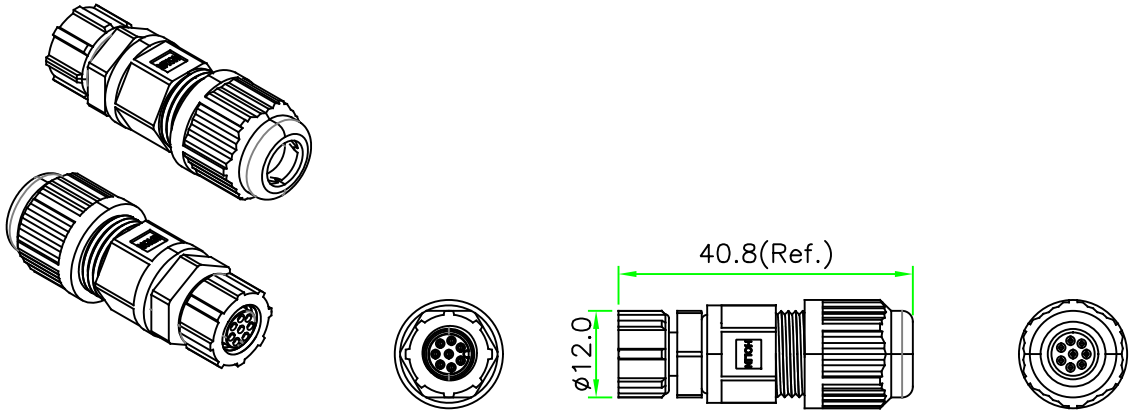


- NOTES:
- ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 1.5A
CONNECTOR TEMPERATURE RANGE: -40°C TO +105°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
 - HOW TO ORDER: A08I-P2xxSA

05 - 5 PINS
06 - 6 PINS
07 - 7 PINS
08 - 8 PINS

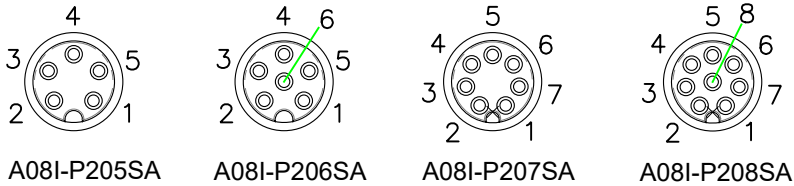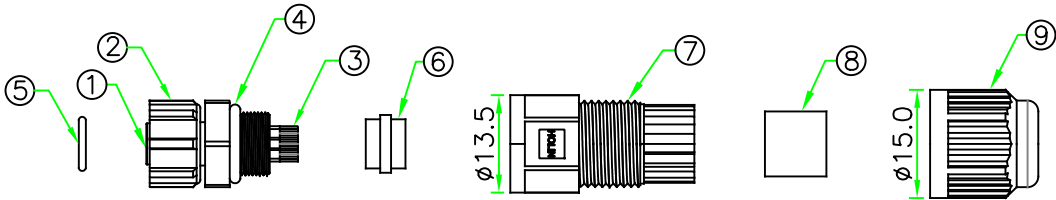

Pin Assignment Front View(前視圖)

#2 Zipper PE Bag.

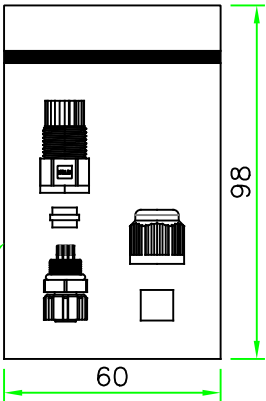

9	CLAMP NUT	NYLON+GF.	BLACK	1	
8	TUBE	SANTOPERENE.	BLACK	1	
7	HOOD	NYLON+GF.	BLACK	1	
6	GASKET	SANTOPERENE.	BLACK	1	
5	O-RING	VITON.	BLACK	1	
4	O-RING	VITON.	BLACK	1	
3	CONTACT	BRASS, Female Pin. 6u" Gold Plated.		N	
2	RING NUT	Nylon+GF.	BLACK	1	
1	CONNECTOR	M8 A-Coding Female Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
UNLESS OTHERWISE SPECIFIED TOLERANCES: XX. ± 0.5 .X ± 0.5, .XX ± 0.25 .XXX ± 0.1, ANGLE ± 1°		UNIT: mm	TITLE	M08 A-Coding Female Connector Female Pin With Solder Bucket Field Installable Plug	
SCALE		1:1	P/N:	A08I-P2xxSA	DR. RUBY CH. SIBYL
REV.		SHEET 1/1	DWG.NO:	A08I-P2xxSA	AP.