

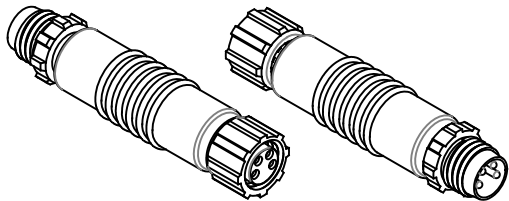
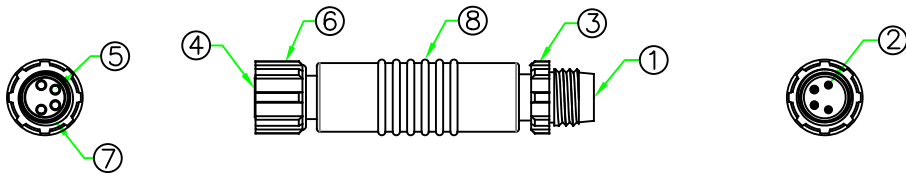


RoHS

REV.	DESCRIPTION	DATE
A	ISSUE	Oct/08/2024

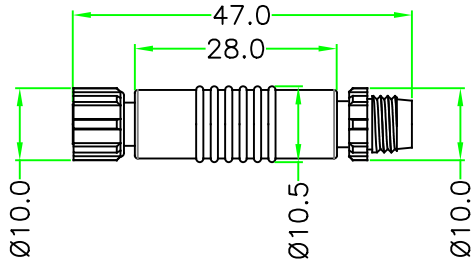


- NOTES:
1. ELECTRICAL CHARACTERISTICS:
CURRENT RATING : 3A
VOLTAGE RATING : 50V a.c./60V d.c.
TEMPERATURE RANGE: -25°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
2. HOW TO ORDER: A08I-PFMxx
- 2 - 2 PINS
 - 3 - 3 PINS
 - 4 - 4 PINS
- CONNECTOR GENDER

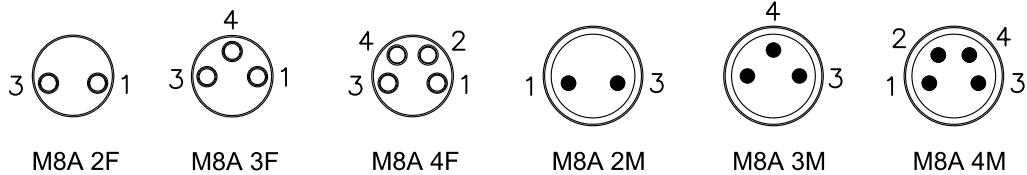

PIN ASSIGNMENT FRONT VIEW (前視圖)

WIRING DIAGRAM



8	OVERMOLD	PU.	BLACK	1	D25 & D26	HOLIN® HTP ASIA TECHNOLOGY CO., LTD.				
7	O-RING	VITON.	BLACK	1		禾凌科技股份有限公司				
6	RING NUT	Nylon+GF.	BLACK	1			UNIT: mm	TITLE : M8 A-Coding Female to Male All Plastic I-Adapter		
5	CONTACT	BRASS. 6u" Gold Plated . Female Pin.		N		SCALE	1:1			
4	CONNECTOR	M8 A-Coding Female Connector Insert. Nylon+GF.	BLACK	1		UNLESS OTHERWISE SPECIFIED TOLERANCES: .XX. ±1.0 .X ±1.0 .XX ±0.5 .XXX ±0.25 ANGLE ± 1°		P/N:	A08I-PFMxx	DR. James
3	RING NUT	Nylon+GF.	BLACK	1						CH. Eric
2	CONTACT	BRASS. 6u" Gold Plated . Male Pin.		N						
1	CONNECTOR	M8 A-Coding Male Connector Insert. Nylon+GF.	BLACK	1		REV.	SHEET	DWG.NO:	A08I-PFMxx	AP.
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS	A	1/1			