
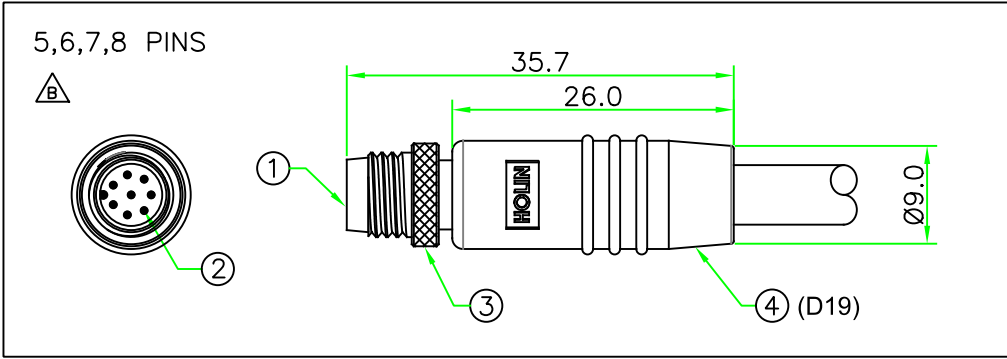


RoHS

REV.	DESCRIPTION	DATE
A	ISSUE	July/01/2008
A1	Add 7~8 Pin & correct Pin Assignment.	Oct/24/2018
B	Change 5~8 Pin overmold.	Oct/07/2023

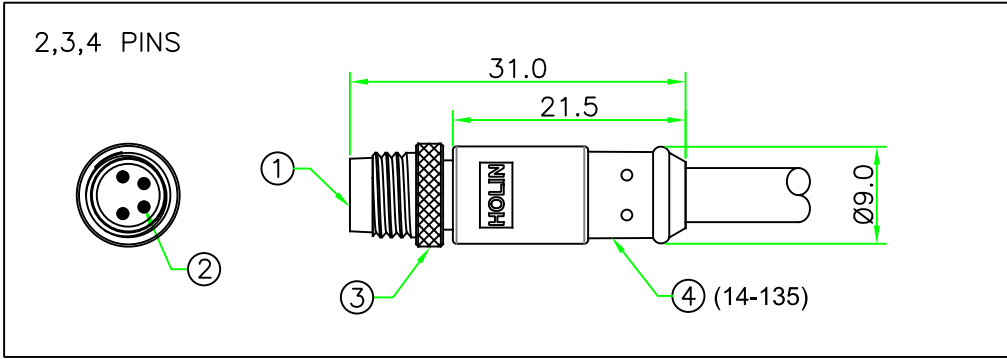

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 1.5A / 3A

TEMPERATURE RANGE: -25°C TO +85°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

2. HOW TO ORDER: A08x-M1xxSN

02 - 2 PINS

03 - 3 PINS

04 - 4 PINS

05 - 5 PINS

06 - 6 PINS


07 - 7 PINS

08 - 8 PINS

I - CURRENT RATING 1.5A

D - CURRENT RATING 3A

※Cable specification and length can be customized.

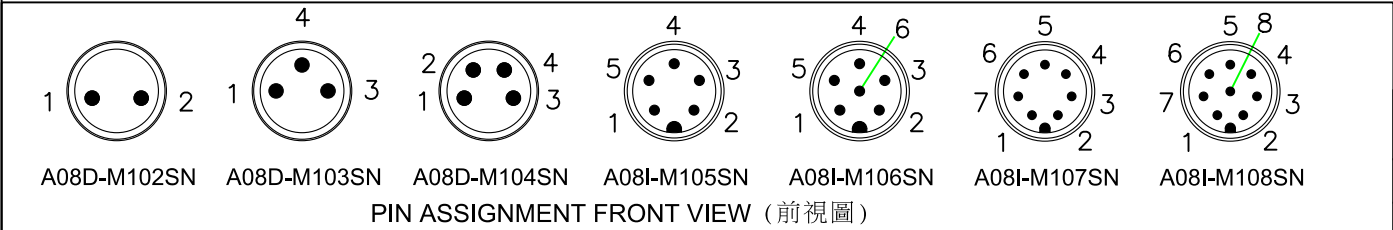

4	OVERMOLD	PVC or PU.	BLACK	1	
3	SCREW NUT	BRASS , Nickel Plated.		1	
2	CONTACT	BRASS , 6 u" Gold Plated. Male Contact.		N	
1	CONNECTOR	M8 A Coding Male Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司							
		UNIT: mm	TITLE M8 A-Coding Male Molded Cable with Metal Screw Nut				
SCALE		1.5:1					
UNLESS OTHERWISE SPECIFIED TOLERANCES: XX. ± 0.5 .X ± 0.5 .XX ± 0.25 .XXX± 0.1 ANGLE ± 1°			P/N: A08x-M1xxSN		DR. James		
					CH. Eric		
			REV. A	SHEET 1/1	DWG.NO: A08x-M1xxSN		AP.