


IP66-68

RoHS

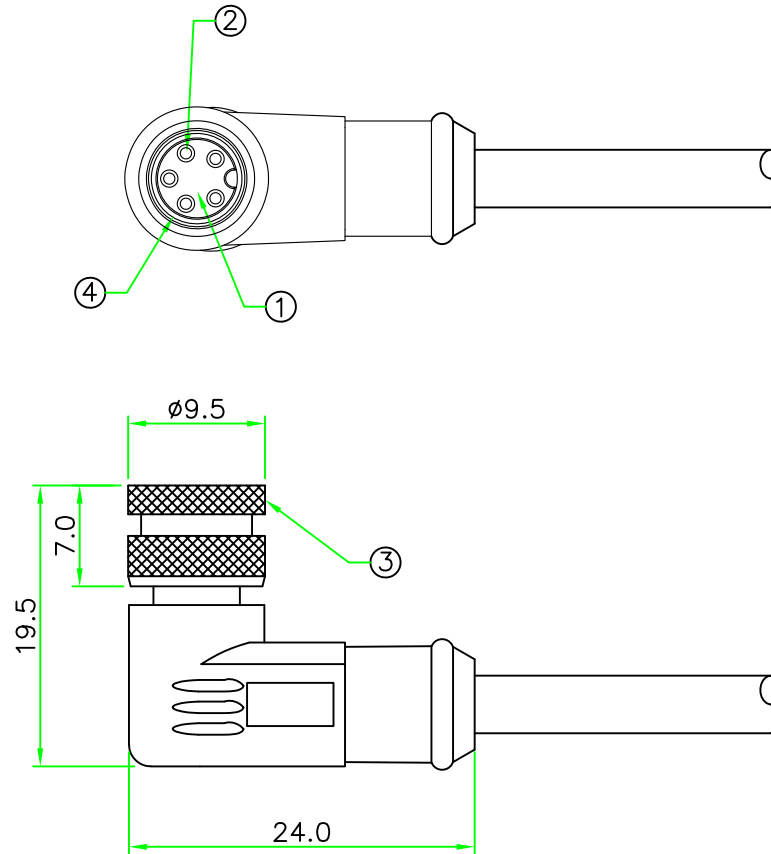

REV.	DESCRIPTION	DATE
A	ISSUE	July/01/2008
A1	Add Item	Apr/30/2015
A2	Add 7~8 Pin & Correct Pin Assignment.	Oct/25/2018

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 1.5A / 3A

TEMPERATURE RANGE: -20°C TO +80°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE


2. HOW TO ORDER: A08x-M2xxRN

A2

02 - 2 PINS 06 - 6 PINS
 03 - 3 PINS 07 - 7 PINS
 04 - 4 PINS 08 - 8 PINS
 05 - 5 PINS

I - CURRENT RATING 1.5A
 D - CURRENT RATING 3A

*Cable specification and length can be customized.

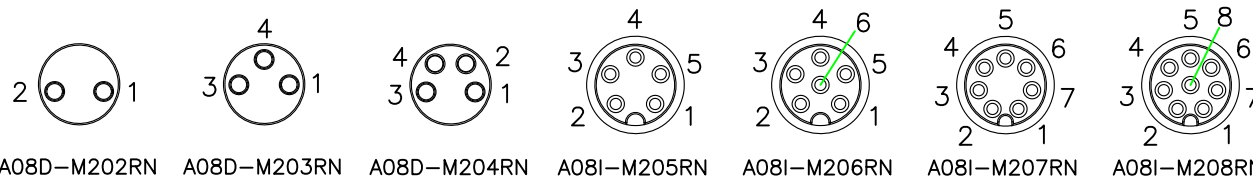

PIN ASSIGNMENT FRONT VIEW (前視圖) A1 A2

4	RING NUT	Brass, Nickel Plated.		1	
3	O-RING	Viton.	BLACK	1	
2	CONTACT	Brass , 6 u" Gold plated. Female Contact.		N	
1	CONNECTOR	M8 A-Coding Female Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

UNIT: mm	TITLE :	M8 A-Coding Female R/A molded cable
SCALE	2:1	
UNLESS OTHERWISE SPECIFIED TOLERANCES:	P/N:	A08x-M2xxRN
.X ± 0.5 .XX ± 0.25 .XXX ± 0.1 ANGLE ± 1°	DR.	SIBYL
REV.	SHEET	CH. ERIC
A2	1/1	AP.
DWG.NO:	A08x-M2xxRN	