


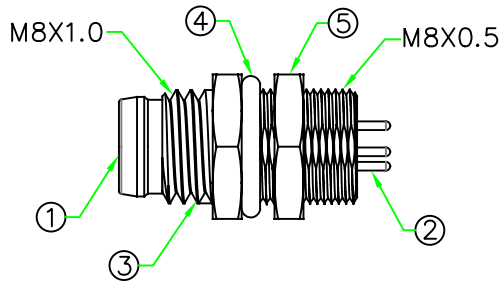
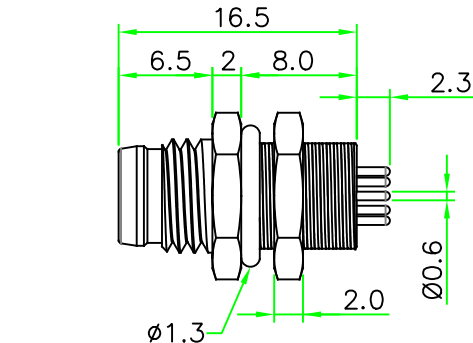



RoHS



REV.	DESCRIPTION	DATE
A	ISSUE	Aug/21/2023

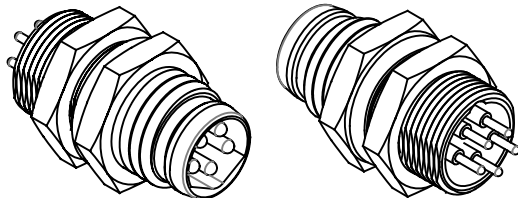

- NOTES:
- ELECTRICAL CHARACTERISTICS:  
CURRENT RATING: 3A  
VOLTAGE RATING: 30V a.c. / 30V d.c.  
TEMPERATURE RANGE: -25°C TO +85°C  
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
  - Panel Thickness Max. 3.5mm.



6	GLUE	Epoxy.	BLACK	1			UNIT: mm	TITLE M8 B-Coding Male Panel Connector Frant Mount Hex Flange With PCB Mount Pin		
5	HEX NUT	BRASS. Nickel Plated.		1		SCALE	2:1			
4	O-RING	Silicon.	BLACK	1		UNLESS OTHERWISE SPECIFIED TOLERANCES: XX. ± 0.5 .X ± 0.5 .XX ± 0.25 .XXX ± 0.1 ANGLE ± 1°		P/N: B08D-M105HPF		DR. James
3	METAL BODY	BRASS. Nickel Plated.		1						CH. Eric
2	CONTACT	BRASS, 6 u" Gold Plated. Male Contact.		5				DWG.NO: B08D-M105HPF		AP.
1	CONNECTOR	M8 B-Coding Male Connector Insert. Nylon+GF.	BLACK	1		REV. A	SHEET 1/1			
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS					