


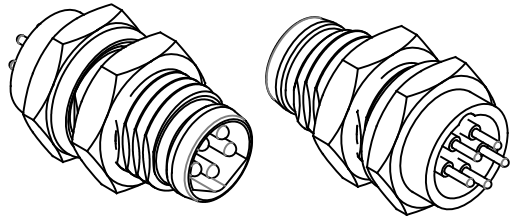

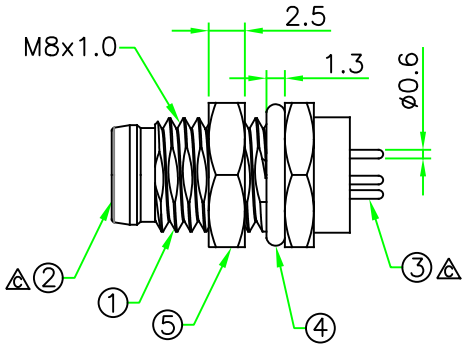
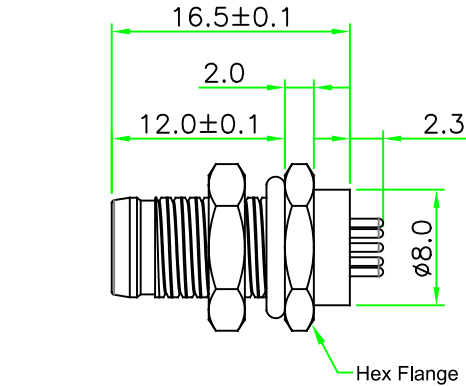


RECOMMENDED
PANEL CUT OUT


RoHS
IP66~68

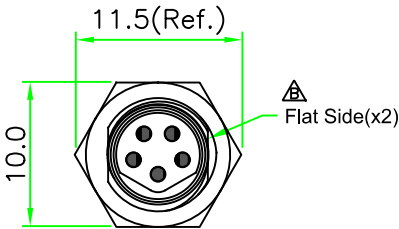

- NOTES:
- ELECTRICAL CHARACTERISTICS:
CURRENT RATING : 3A
VOLTAGE RATING : 30V a.c. / 30V d.c.
TEMPERATURE RANGE: -25°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
 - Panel Thickness Max. 3.2mm.



PIN ASSIGNMENT
FRONT VIEW
(前視圖)



PCB LAYOUT

6	GLUE		Epoxy.	BLACK	1			UNIT: mm	TITLE	M8 B-Coding Male Panel Connector Rear mount Hex Flange With PCB Pin
5	HEX NUT		BRASS. Nickel Plated.		1		SCALE	2:1		
4	O-RING		Silicon.	BLACK	1		UNLESS OTHERWISE SPECIFIED TOLERANCES: XX. ± 0.5 .X ± 0.5 .XX ± 0.25 .XXX ± 0.1 ANGLE ± 1°			
3	CONTACT		BRASS , 6 u" Gold Plated. Male Contact.		5					P/N: B08D-M105HPR
2	CONNECTOR		M8 B-Coding Male Connector Insert. Nylon+GF.	BLACK	1					DR. JAMES CH. ERIC
1	SHELL		BRASS, Nickel Plated.		1		REV.	SHEET	DWG.NO:	AP.
No.	PART NAME		DESCRIPTION	COLOR	Q'TY	REMARKS	C	1/1	B08D-M105HPR	