



REV.	DESCRIPTION	DATE
A	ISSUE(EC-109013)	May/25/2020







RECOMMENDED
PANEL CUT OUT

RoHS
IP67

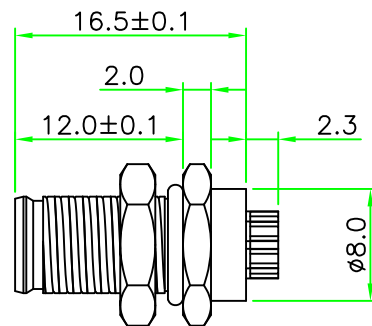


Hex Flange

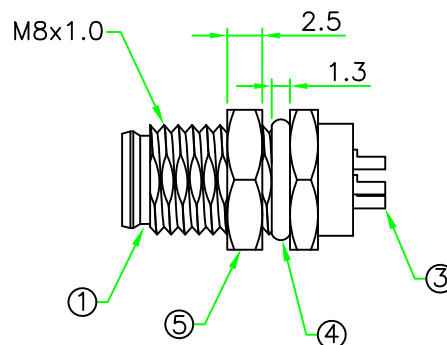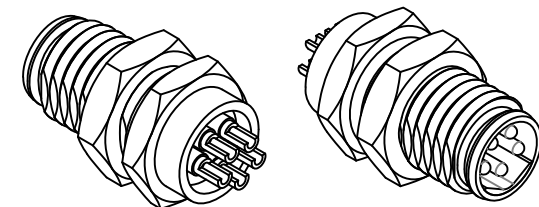


NOTES:

- ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 3A
TEMPERATURE RANGE: -25°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
- Panel Thickness Max. 3.2mm.



PIN ASSIGNMENT
FRONT VIEW
(前視圖)



HOLIN [®] HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司			
	UNIT: mm	TITLE : M8 B-Coding Male Panel Connector Rear mount Hex Flange With Solder Pin	
SCALE	2:1	P/N: B08D-M105HSR	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .X ± 0.5 .XX ± 0.25 .XXX ± 0.1 ANGLE ± 1°		DR. SIBYL	
REV. A		CH. JAMES	
SHEET 1/1		DWG.NO: B08D-M105HSR	
AP.			

No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS
5	HEX NUT	Brass, Nickel Plated.		1	
4	O-RING	Silicon.	BLACK	1	
3	CONTACT	Brass , 6 u" Gold Plated. Male Contact.		5	
2	CONNECTOR	M8 B-Coding Male Connector Insert. Nylon+GF.	BLACK	1	
1	SHELL	Brass(GS5A C6802), Nickel Plated.		1	