

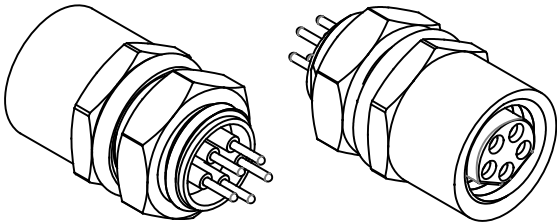

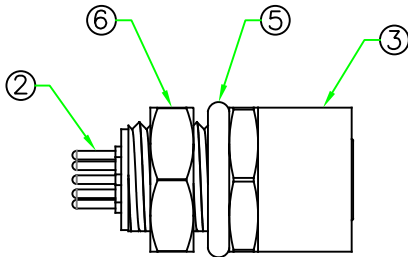
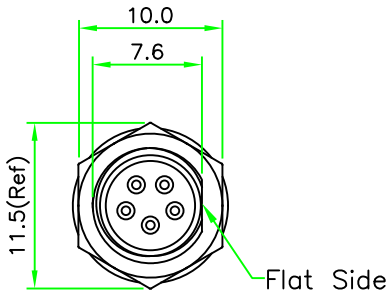


RECOMMENDED
PANEL CUT OUT

RoHS



- NOTES:
- ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 3A
VOLTAGE RATING: 30V a.c. / 30V d.c.
TEMPERATURE RANGE: -25°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
 - Panel Thickness Max. 2.0mm.



6	HEX NUT	BRASS, Nickel Plated.		1			UNIT: mm	TITLE	M8 B-Coding Female Panel Connector Front Mount Hex Flange With PCB Mount Pin
5	O-RING	Silcon.	BLACK	1		SCALE	2:1	P/N:	B08D-M205HPF
4	O-RING	Viton.	BLACK	1		UNLESS OTHERWISE SPECIFIED TOLERANCES:		DR.	Sibyl
3	HOUSING	BRASS, Nickel Plated.		1		XX, ± 0.5		CH.	Eric
2	CONTACT	BRASS, 6 u" Gold Plated. Female Contact.		5		.X ± 0.5, .XX ± 0.25		DWG.NO:	B08D-M205HPF
1	CONNECTOR	M8 B-Coding Female Connector Insert. Nylon+GF.	BLACK	1		.XXX± 0.1, ANGLE ± 1°		AP.	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS	REV.	SHEET		
						A	1/1		