






RECOMMENDED
PANEL CUT OUT

RoHS

IP66~68

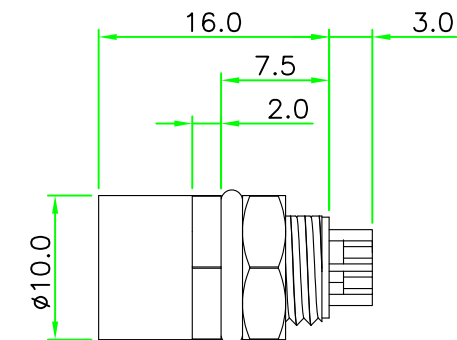

Hex Flange

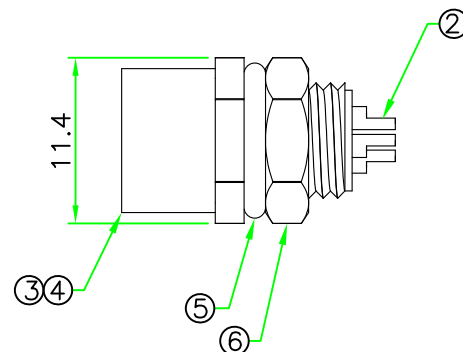

PIN ASSIGNMENT
FRONT VIEW
(前視圖)

REV.	DESCRIPTION	DATE
A	ISSUE	Oct/29/2018

NOTES:

- ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 3A
TEMPERATURE RANGE: -25°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE

6	HEX NUT	Brass, Nickel Plated.		1	
5	O-RING	Silcon.	BLACK	1	
4	O-RING	Viotn.	BLACK	1	
3	HOUSING	Brass, Nickel Plated.		1	
2	CONTACT	Brass , 6 u" Gold Plated. Female Contact.		5	
1	CONNECTOR	M8 B-Coding Female Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
		UNIT: mm	TITLE : M08 B-Coding Female Panel Connector Front mount Hex Flange With Solder Bucket Pin		
SCALE		2:1			
UNLESS OTHERWISE SPECIFIED TOLERANCES: .x ± 0.5 .xx ± 0.25 .xxx ± 0.1 ANGLE ± 1°			P/N: B08D-M205HSF		DR. SIBYL
					CH. ERIC
REV. A	SHEET 1/1	DWG.NO: B08D-M205HSF		AP.	