


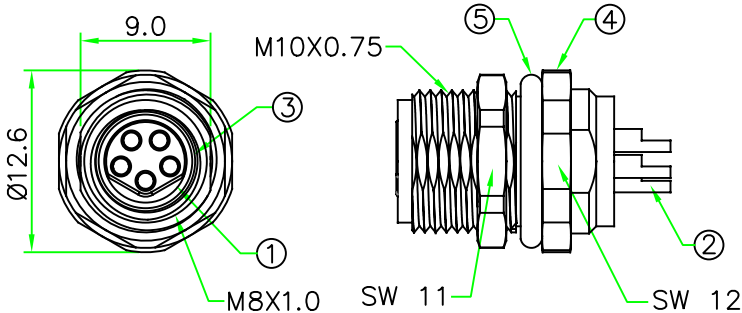



RoHS




REV.	DESCRIPTION	DATE
A	ISSUE	Aug/11/2023

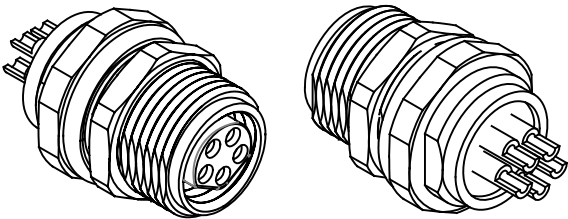

- NOTES:
- ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 3A
VOLTAGE RATING: 30V a.c. / 30V d.c.
TEMPERATURE RANGE: -25°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
 - Panel Thickness Max. 4.5mm.



6	GLUE	Epoxy.	BLACK	1			UNIT: mm	TITLE	M8 B-Coding Female Panel Connector Rear Mount Hex Flange With Solder Bucket Pin		
5	O-RING	VITON.	BLACK	1		SCALE	2:1				
4	BODY	BRASS. Nickel Plated.		1		UNLESS OTHERWISE SPECIED TOLERANCES: XX. ± 0.5 .X ± 0.5 .XX ± 0.25 .XXX± 0.1 ANGLE ± 1°		P/N:	B08D-M205HSR	DR.	James
3	O-RING	VITON.	BLACK	1						CH.	Eric
2	CONTACT	BRASS, 6 u" Gold Plated. Female Contact.		5				REV.	SHEET	DWG.NO:	B08D-M205HSR
1	CONNECTOR	M8 B-Coding Female Connector Insert. Nylon+GF.	BLACK	1							
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS	A	1/1				