


IP66-68

RoHS

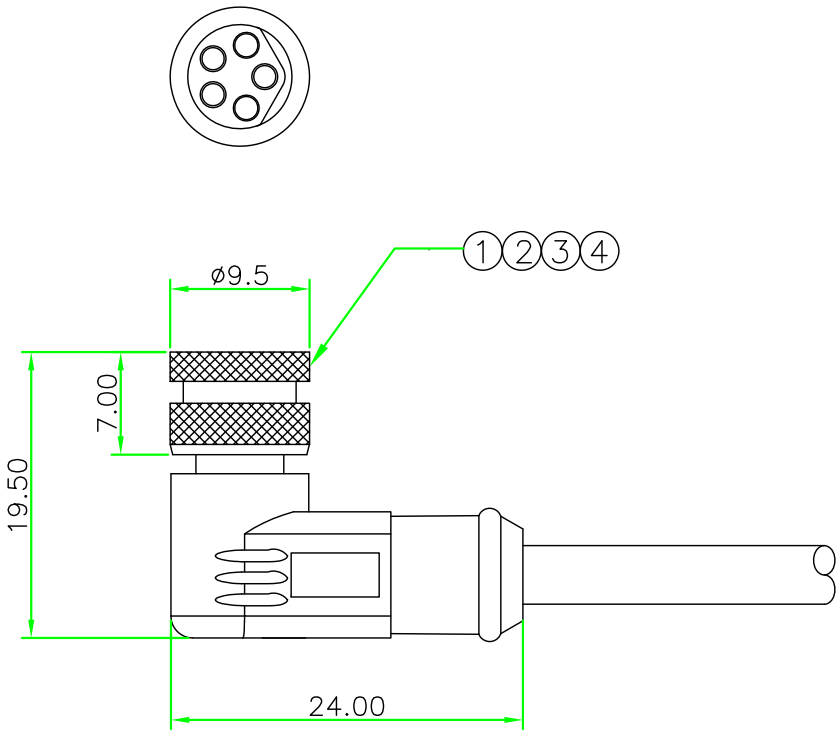

REV.	DESCRIPTION	DATE
A	ISSUE	Mar/05/2014

NOTES:
1. ELECTRICAL CHARACTERISTICS:
CURRENT RATING:< 4A
TEMPERATURE RANGE: -25°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE

✱Cable specification and length can be customized.

4	Ring Nut	Brass, Nickel plated, with ratchet mechanism,without sleeve.		1		HOLIN[®] HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司 UNIT:mm TITLE : M8 B Code Female R/A molded cable Ass'y UNLESS OTHERWISE SPECIED TOLERANCES: X ± 0.25 XX ± 0.1 XXX ± 0.05 ANGLE ± 1°X REV. A SHEET 1/1 P/N: B08D-M205RN DWG.NO: B08D-M205RN DR. Patty CH. ERIC AP.
3	O-Ring	VITON.	BLACK	1		
2	Contact	Brass, 6 u" Gold plated .Female Contact.		5		
1	Connector	M8 Female connector insert.	BLACK	1		
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS	