



IP66-68

RoHS

REV.	DESCRIPTION	DATE
A	ISSUE	Mar/05/2014

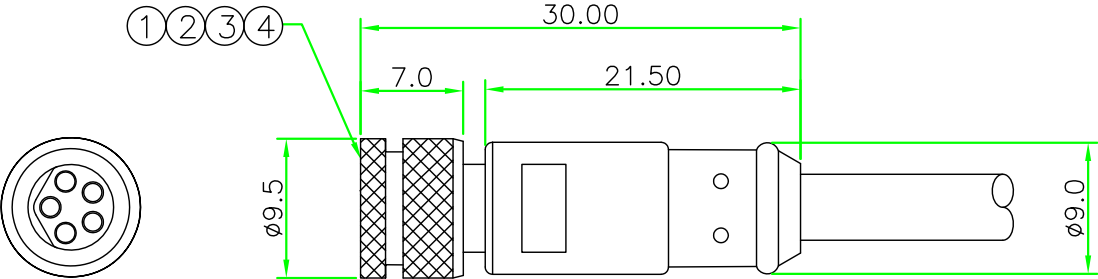

NOTES:
1. ELECTRICAL CHARACTERISTICS:
CURRENT RATING: < 4A
TEMPERATURE RANGE: -25°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE



PIN ASSIGNMENT FRONT VIEW
正視圖

✳Cable specification and length can be customized.

4	RING NUT	BRASS, nickel plated with ratchet mechanism,without sleeve		1	
3	O-RING	VITON	BLACK	1	
2	Contact	BRASS , 6 u" Gold plated .Female Contact.		5	
1	Connector	M8 Female connector insert.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN[®] HTP ASIA TECHNOLOGY CO., LTD.
禾 凌 科 技 股 份 有 限 公 司

	UNIT:mm	TITLE : M8 B Code Female molded cable Ass'y	
SCALE	2:1	P/N: B08D-M205SN	DR. Patty
UNLESS OTHERWISE SPECIED TOLERANCES: x ± 0.25 xx ± 0.1 xxx ± 0.05 ANGLE ± 1°X			CH. ERIC
REV. A	SHEET 1/1	DWG.NO: B08D-M205SN	AP.