

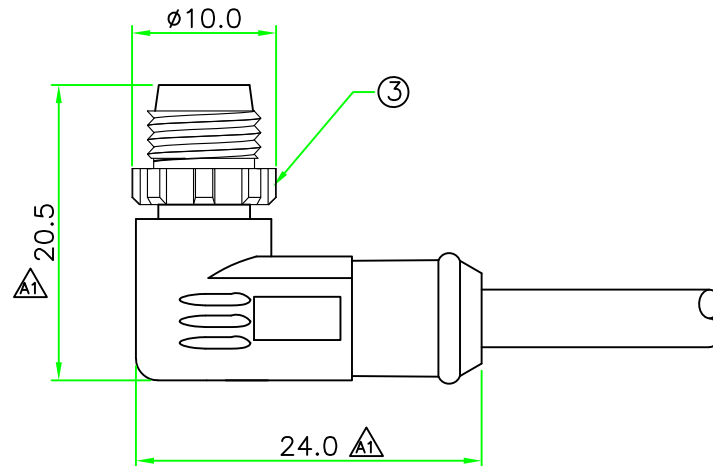


RoHS

IP66-68

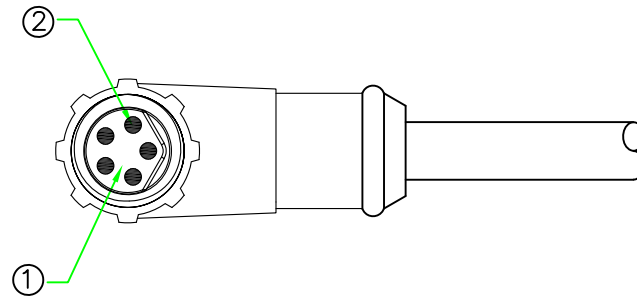

PIN ASSIGNMENT
FRONT VIEW
(前視圖)

*Cable specification and length can be customized.

3	RING NUT	Nylon+GF.	BLACK	1	
2	CONTACT	Brass, 6 u" Gold Plated. Male Contact.		5	
1	CONNECTOR	M8 B-Coding Male Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

REV.	DESCRIPTION	DATE
A	ISSUE	Apr/29/2015
A1	Correct Dimension.	Oct/29/2018

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 3A

TEMPERATURE RANGE: -20°C TO +80°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
	UNIT:mm	TITLE : M8 B-Coding Male			
SCALE	2:1	All Plastic R/A molded cable			
UNLESS OTHERWISE SPECIFIED TOLERANCES: .X ± 0.5 .XX ± 0.25 .XXX± 0.1 ANGLE ± 1°		P/N: B08D-P105RN		DR.	SIBYL
REV. A1		SHEET 1/1		CH.	ERIC
		DWG.NO: B08D-P105RN		AP.	