

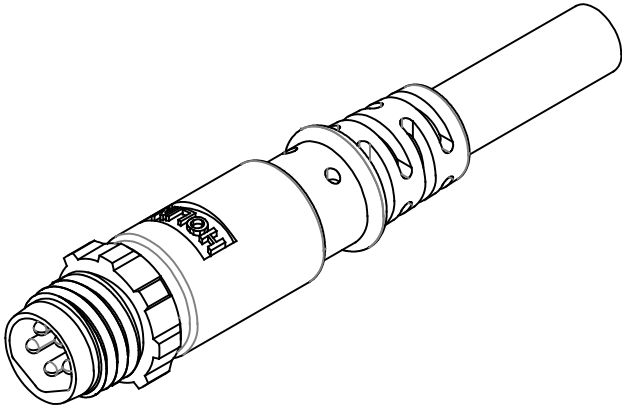


RoHS

REV.	DESCRIPTION	DATE
A	ISSUE	Oct/24/2024



- NOTES:
1. ELECTRICAL CHARACTERISTICS:
- CURRENT RATING: 3A
- VOLTAGE RATING: 30V a.c./30V d.c.
- TEMPERATURE RANGE: -20°C TO +80°C
- DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE

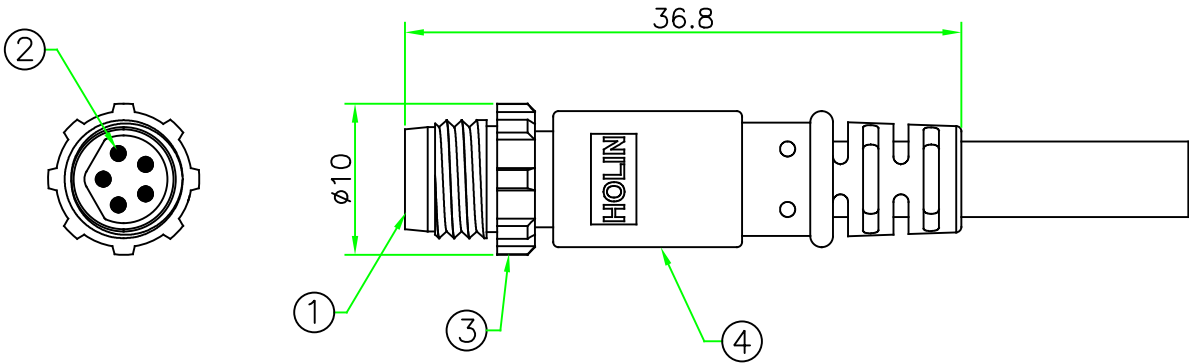

PIN ASSIGNMENT
FRONT VIEW
(前視圖)

※Cable specification and length can be customized.

4	OVERMOLD	PVC or PU.	BLACK	1	
3	RING NUT	Nylon+GF.	BLACK	1	
2	CONTACT	Brass, 6 u" Gold plated. Male Contact.		5	
1	CONNECTOR	M8 B-Coding Male Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
		UNIT: mm	TITLE : M8 B-Coding Male All Plastic Molded Cable Ass'y		
SCALE		2:1			
UNLESS OTHERWISE SPECIFIED TOLERANCES: XX. ± 1.0 .X ± 1.0 .XX ± 0.5 .XXX ± 0.25 ANGLE ± 1°			P/N: B08D-P105SM	DR. SIBYL	
				CH. JAMES	
			REV. A	SHEET 1/1	DWG.NO: B08D-P105SM