

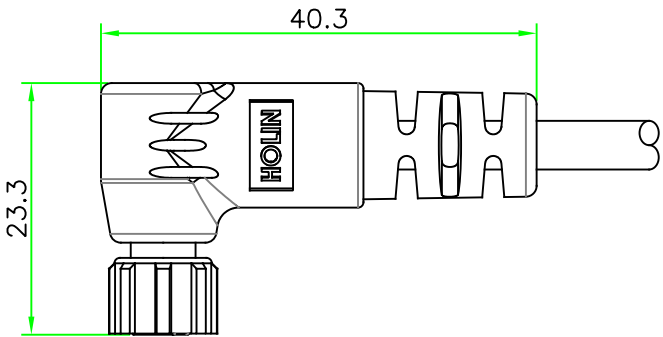


RoHS

REV.	DESCRIPTION	DATE
A	ISSUE	Aug/08/2023




NOTES:
1. ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 3A
VOLTAGE RATING: 30V a.c./30V d.c.
TEMPERATURE RANGE: -20°C TO +80°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE

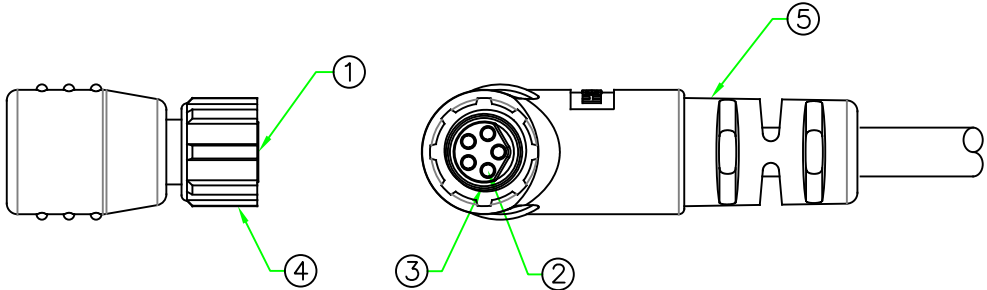

PIN ASSIGNMENT
FRONT VIEW
(前視圖)

※Cable specification and length can be customized.

5	OVERMOLD	PVC or PU.	BLACK	1	
4	RING NUT	Nylon+GF.	BLACK	1	
3	O-RING	VITON.	BLACK	1	
2	CONTACT	BRASS, 6 u" Gold Plated. Female Contact.		5	
1	CONNECTOR	M8 B-Coding Female Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司							
		UNIT: mm	TITLE M8 B-Coding Female Plastic Ring Nut Right Angle Molded Cable Ass'y				
SCALE		1.5:1					
UNLESS OTHERWISE SPECIFIED TOLERANCES: XX. ± 1.0 .X ± 1.0 .XX ± 0.5 .XXX± 0.25 ANGLE ± 1°			P/N: B08D-P205RM		DR. James		
					CH. Eric		
			REV. A	SHEET 1/1	DWG.NO: B08D-P205RM		AP.