

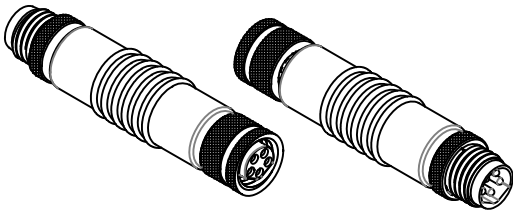
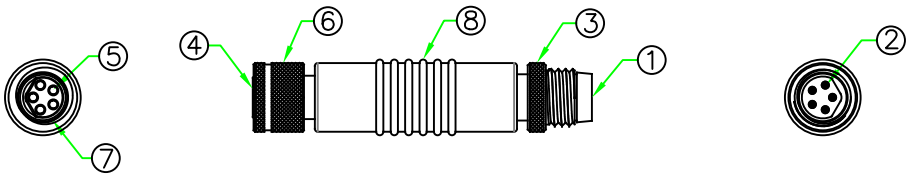
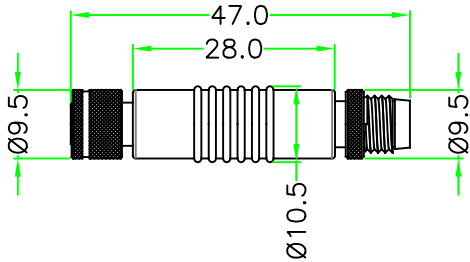


RoHS

REV.	DESCRIPTION	DATE
A	ISSUE	Oct/08/2024



- NOTES:
- ELECTRICAL CHARACTERISTICS:
CURRENT RATING : 3A
VOLTAGE RATING : 30V a.c./30V d.c.
TEMPERATURE RANGE: -25°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
 - HOW TO ORDER: B08I-MFM55
└─ 5 - 5 PINS
└─ CONNECTOR GENDER

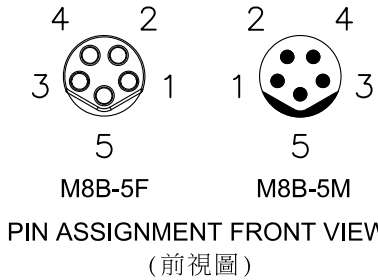

8	OVERMOLD	PU.	BLACK	1	D25 & D26	HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司			
7	O-RING	VITON.	BLACK	1		TITLE : M8 B-Coding Female to Male I-Adapter			
6	RING NUT	BRASS. Nickel Plated.		1		UNIT: mm	P/N: B08I-MFM55 DR. James		
5	CONTACT	BRASS. 6u" Gold Plated . Female Pin.		5		SCALE 1:1			
4	CONNECTOR	M8 B-Coding Female Connector Insert. Nylon+GF.	BLACK	1		UNLESS OTHERWISE SPECIFIED TOLERANCES: XX. ±1.0 .X ±1.0 .XX ±0.5 .XXX ±0.25 ANGLE ± 1°			
3	RING NUT	BRASS. Nickel Plated.		1		REV.			
2	CONTACT	BRASS. 6u" Gold Plated . Male Pin.		5		SHEET 1/1			
1	CONNECTOR	M8 B-Coding Male Connector Insert. Nylon+GF.	BLACK	1		DWG.NO: B08I-MFM55	CH. Eric		
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS	A	AP.		