

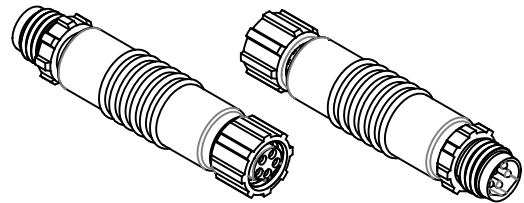
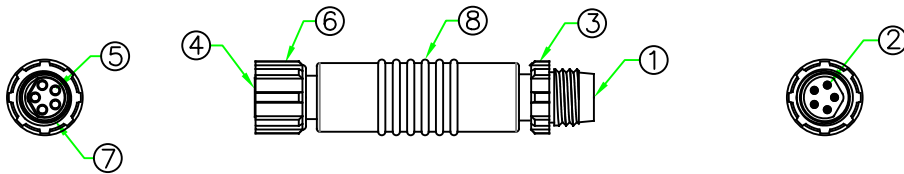
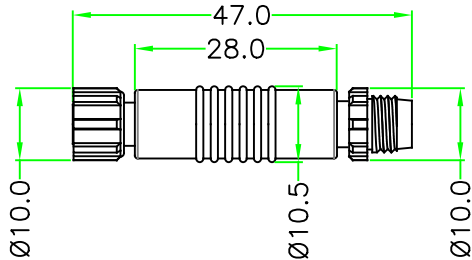


RoHS

| REV. | DESCRIPTION | DATE        |
|------|-------------|-------------|
| A    | ISSUE       | Oct/08/2024 |
|      |             |             |
|      |             |             |



- NOTES:
- 1. ELECTRICAL CHARACTERISTICS:  
CURRENT RATING : 3A  
VOLTAGE RATING : 30V a.c./30V d.c.  
TEMPERATURE RANGE: -25°C TO +85°C  
DIELECTRIC WITHSTANDING VOLTAGE:  
500V AC FOR ONE MINUTE
  - 2. HOW TO ORDER: B08I-PFM55  
└─ 5 - 5 PINS  
└─ CONNECTOR GENDER

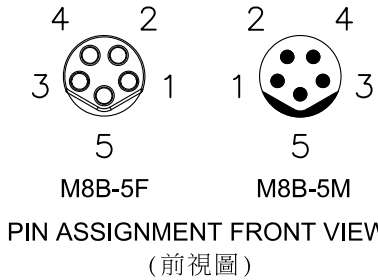

|     |           |                                                |       |      |           |                                                                                                    |          |                                                             |  |           |  |
|-----|-----------|------------------------------------------------|-------|------|-----------|----------------------------------------------------------------------------------------------------|----------|-------------------------------------------------------------|--|-----------|--|
| 8   | OVERMOLD  | PU.                                            | BLACK | 1    | D25 & D26 | HOLIN® HTP ASIA TECHNOLOGY CO., LTD.<br>禾凌科技股份有限公司                                                 |          |                                                             |  |           |  |
| 7   | O-RING    | VITON.                                         | BLACK | 1    |           |                                                                                                    |          |                                                             |  |           |  |
| 6   | RING NUT  | Nylon+GF.                                      | BLACK | 1    |           |               | UNIT: mm | TITLE : M8 B-Coding Female to Male<br>All Plastic I-Adapter |  |           |  |
| 5   | CONTACT   | BRASS. 6u" Gold Plated . Female Pin.           |       | 5    |           | SCALE                                                                                              | 1:1      |                                                             |  |           |  |
| 4   | CONNECTOR | M8 B-Coding Female Connector Insert. Nylon+GF. | BLACK | 1    |           | UNLESS OTHERWISE<br>SPECIFIED TOLERANCES:<br>xx. ±1.0<br>.x ±1.0 .xx ±0.5<br>.xxx ±0.25 ANGLE ± 1° |          | P/N:<br><br>B08I-PFM55                                      |  | DR. James |  |
| 3   | RING NUT  | Nylon+GF.                                      | BLACK | 1    |           |                                                                                                    |          |                                                             |  | CH. Eric  |  |
| 2   | CONTACT   | BRASS. 6u" Gold Plated . Male Pin.             |       | 5    |           |                                                                                                    |          | REV. A                                                      |  | SHEET 1/1 |  |
| 1   | CONNECTOR | M8 B-Coding Male Connector Insert. Nylon+GF.   | BLACK | 1    |           |                                                                                                    |          |                                                             |  |           |  |
| No. | PART NAME | DESCRIPTION                                    | COLOR | Q'TY | REMARKS   |                                                                                                    |          |                                                             |  |           |  |