

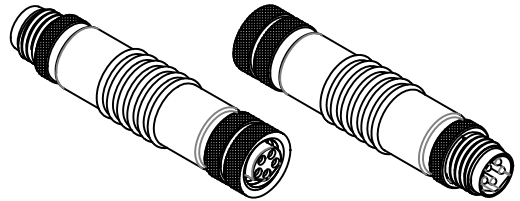
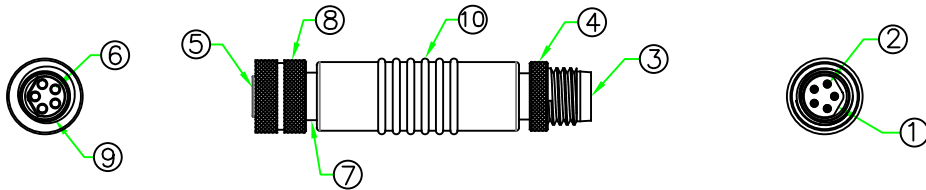


RoHS

REV.	DESCRIPTION	DATE
A	ISSUE	Oct/08/2024

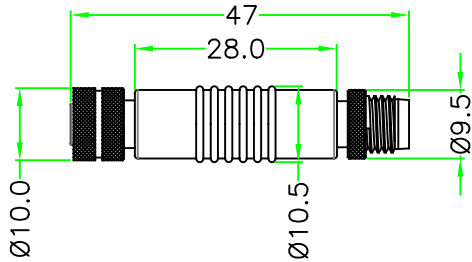

- NOTES:
- ELECTRICAL CHARACTERISTICS:
CURRENT RATING : 3A
VOLTAGE RATING : 30V a.c./30V d.c.
TEMPERATURE RANGE: -25°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
 - HOW TO ORDER: B08I-SFM55
└─ 5 - 5 PINS
└─ CONNECTOR GENDER

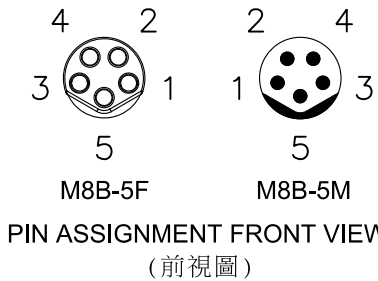

WIRING DIAGRAM

M8B 5F	M8B 5M
1	1
2	2
3	3
4	4
5	5

10	OVERMOLD	PU.	BLACK	1	D25 & D26
9	O-RING	VITON.	BLACK	1	
8	RING NUT	BRASS. Nickel Plated.		1	
7	METAL SHELL	BRASS. Nickel Plated.		1	
6	CONTACT	BRASS. 6u" Gold Plated . Female Pin.		5	
5	CONNECTOR	M8 B-Coding Female Connector Insert. Nylon+GF.	BLACK	1	
4	RING NUT	BRASS. Nickel Plated.		1	
3	METAL SHELL	BRASS. Nickel Plated.		1	
2	CONTACT	BRASS. 6u" Gold Plated . Male Pin.		5	
1	CONNECTOR	M8 B-Coding Male Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
	UNIT: mm	TITLE : M8 B-Coding Female to Male Shielded I-Adapter			
SCALE	1:1	P/N: B08I-SFM55		DR. James	
UNLESS OTHERWISE SPECIFIED TOLERANCES: XX. ±1.0 .X ±1.0 .XX ±0.5 .XXX ±0.25 ANGLE ± 1°		CH. Eric			
REV. A	SHEET 1/1	DWG.NO: B08I-SFM55		AP.	