

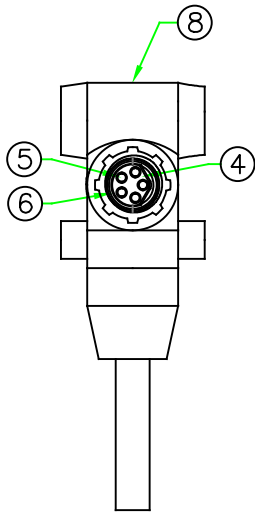
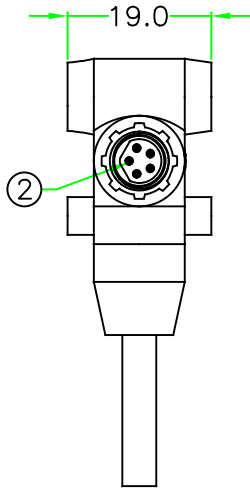



RoHS

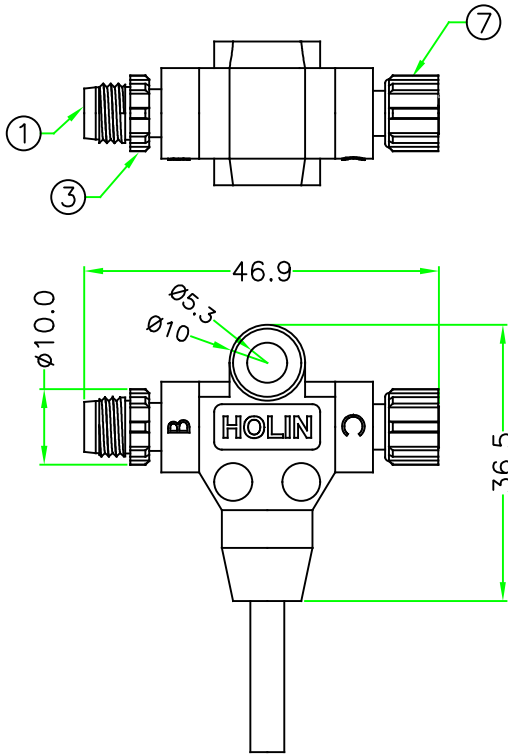

REV.	DESCRIPTION	DATE
A	ISSUE	Nov/27/2024

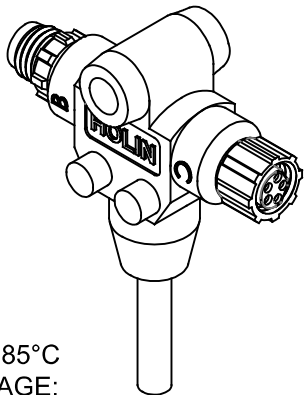


- NOTES:
1. ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 3A
VOLTAGE RATING; 30V D.C or A.C
TEMPERATURE RANGE: -25°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE

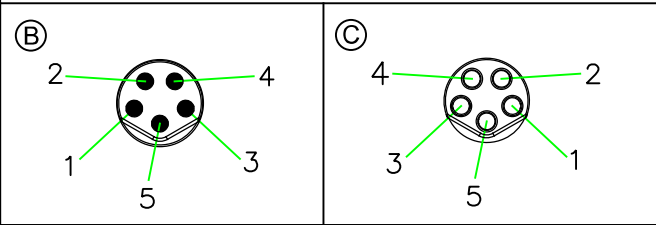

PIN ASSIGNMENT FRONT VIEW (前視圖)

※Cable specification and length can be customized.

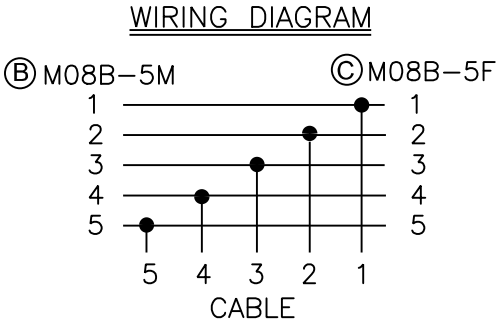

8	OVERMOLD	PU.	BLACK	1	
7	RING NUT	Nylon+GF.	BLACK	1	
6	O-RING	Viton.	BLACK	1	
5	CONTACT	Brass , 6 u" Gold Plated. Female Contact.		5	
4	CONNECTOR	M8 B-Coding Female Connector Insert. Nylon+GF.	BLACK	1	
3	RING NUT	Nylon+GF.	BLACK	1	
2	CONTACT	Brass , 6 u" Gold Plated. Male Contact.		5	
1	CONNECTOR	M8 B-Coding Male Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
UNIT: mm		TITLE : M8 B-Coding Male to Female All Plastic Molded Cable			
SCALE 1:1		P/N: B08T-PCMF055		DR. SIBYL	
UNLESS OTHERWISE SPECIFIED TOLERANCES: XX, ±1.0 .X ±1.0 .XX ±0.5 .XXX ±0.25 ANGLE ± 1°		DWG.NO: B08T-PCMF055		CH. JAMES	
REV. A	SHEET 1/1			AP.	