


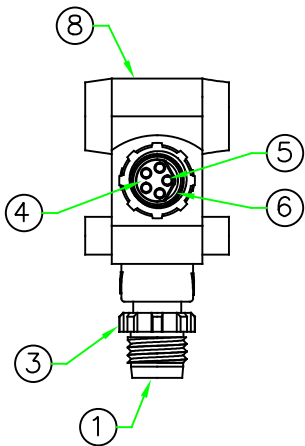
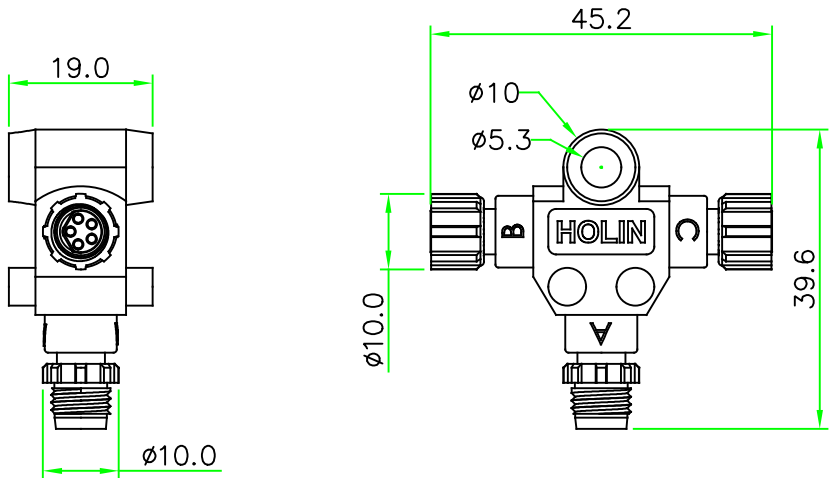


RoHS


REV.	DESCRIPTION	DATE
A	ISSUE	Oct/21/2024

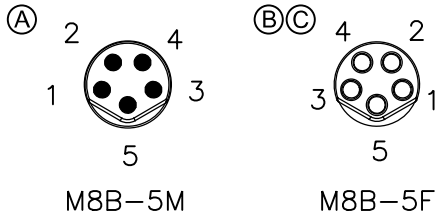

NOTES:
1. ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 3A
VOLTAGE RATING: 30V a.c. / 30V d.c.
TEMPERATURE RANGE: -25°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE

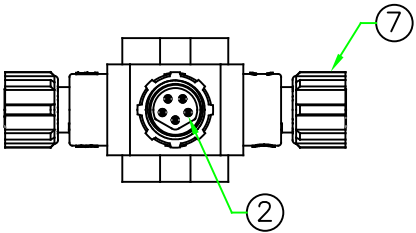

PIN ASSIGNMENT
FRONT VIEW (前視圖)

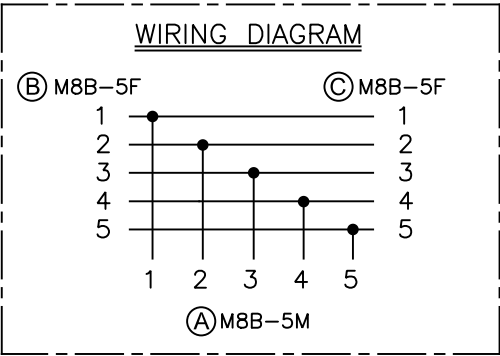

8	OVERMOLD	PU.	BLACK	1	
7	RING NUT	Nylon+GF.	BLACK	2	
6	O-RING	Viton.	BLACK	2	
5	CONTACT	Brass. 6u" Gold Plated. Female Pin.		10	
4	CONNECTOR	M8 B-Coding Female Connector Insert. Nylon+GF.	BLACK	2	
3	RING NUT	Nylon+GF.	BLACK	1	
2	CONTACT	Brass. 6u" Gold Plated. Male Pin.		5	
1	CONNECTOR	M8 B-Coding Male Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司		TITLE M8 B CODING ALL PLASTIC T-ADAPTOR	
UNIT: mm	SCALE 1:1	P/N: B08T-PMFF555	DR. SIBYL
UNLESS OTHERWISE SPECIFIED TOLERANCES: .XX ± 0.5 .X ± 0.5 .XX ± 0.25 .XXX ± 0.1 ANGLE ± 1°	REV. A	DWG.NO: B08T-PMFF555	CH. JAMES
	SHEET 1/1		AP.