


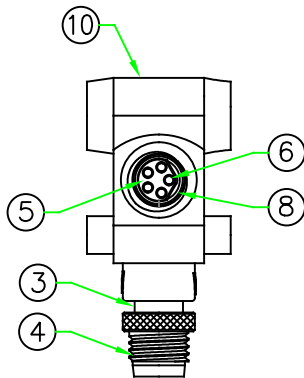
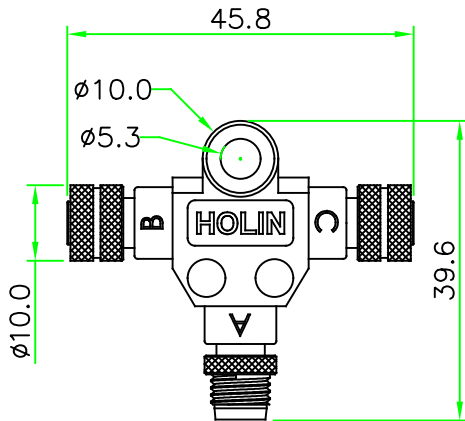
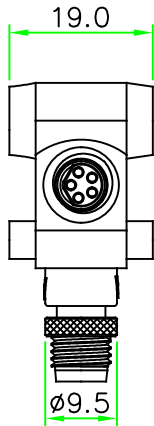


RoHS


| REV. | DESCRIPTION | DATE        |
|------|-------------|-------------|
| A    | ISSUE       | Oct/21/2024 |
|      |             |             |
|      |             |             |

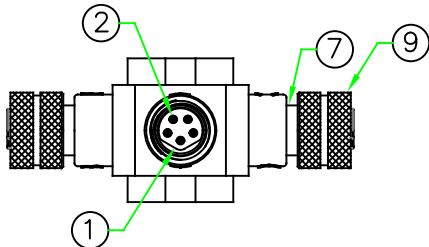

NOTES:  
1. ELECTRICAL CHARACTERISTICS:  
CURRENT RATING: 3A  
VOLTAGE RATING: 30V a.c. / 30V d.c.  
TEMPERATURE RANGE: -25°C TO +85°C  
DIELECTRIC WITHSTANDING VOLTAGE:  
500V AC FOR ONE MINUTE

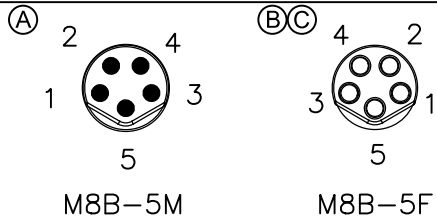

PIN ASSIGNMENT  
FRONT VIEW (前視圖)

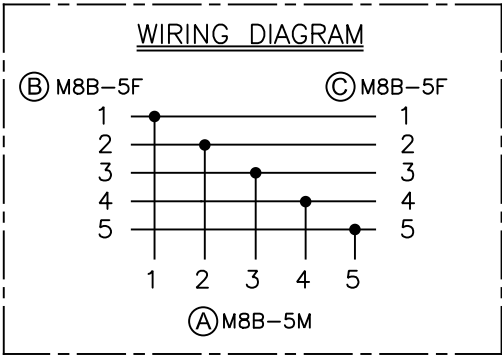

|     |             |                                                |       |      |         |
|-----|-------------|------------------------------------------------|-------|------|---------|
| 10  | OVERMOLD    | PU.                                            | BLACK | 1    |         |
| 9   | RING NUT    | Brass. Nickel Plated.                          |       | 2    |         |
| 8   | O-RING      | Viton.                                         | BLACK | 2    |         |
| 7   | METAL SHELL | Brass. Nickel Plated.                          |       | 2    |         |
| 6   | CONTACT     | Brass. 6u" Gold Plated. Female Pin.            |       | 10   |         |
| 5   | CONNECTOR   | M8 B-Coding Female Connector Insert. Nylon+GF. | BLACK | 2    |         |
| 4   | RING NUT    | Brass. Nickel Plated.                          |       | 1    |         |
| 3   | METAL SHELL | Brass. Nickel Plated.                          |       | 1    |         |
| 2   | CONTACT     | Brass. 6u" Gold Plated. Male Pin.              |       | 5    |         |
| 1   | CONNECTOR   | M8 B-Coding Male Connector Insert. Nylon+GF.   | BLACK | 1    |         |
| No. | PART NAME   | DESCRIPTION                                    | COLOR | Q'TY | REMARKS |

|                                                                                         |              |                                            |           |
|-----------------------------------------------------------------------------------------|--------------|--------------------------------------------|-----------|
| HOLIN® HTP ASIA TECHNOLOGY CO., LTD.<br>禾凌科技股份有限公司                                      |              | TITLE<br>M8 B CODING SHIELDED<br>T-ADAPTOR |           |
| UNIT: mm                                                                                | SCALE<br>1:1 | P/N:<br>B08T-SMFF555                       | DR. SIBYL |
| UNLESS OTHERWISE<br>SPECIED TOLERANCES:<br>.X ± 0.5 .XX ± 0.25<br>.XXX ± 0.1 ANGLE ± 1° | REV.<br>A    | DWG.NO:<br>B08T-SMFF555                    | CH. JAMES |
|                                                                                         | SHEET<br>1/1 |                                            | AP.       |