


RoHS


IP66

HDMI®
HIGH-DEFINITION MULTIMEDIA INTERFACE


REV.	DESCRIPTION	DATE
A	ISSUE	Nov/02/2018
B	接點變更	Sep/25/2020
note1	Correct P/N & Dwg No.(EC-111008)	Apr/15/2022




HDMCC-P4SN△

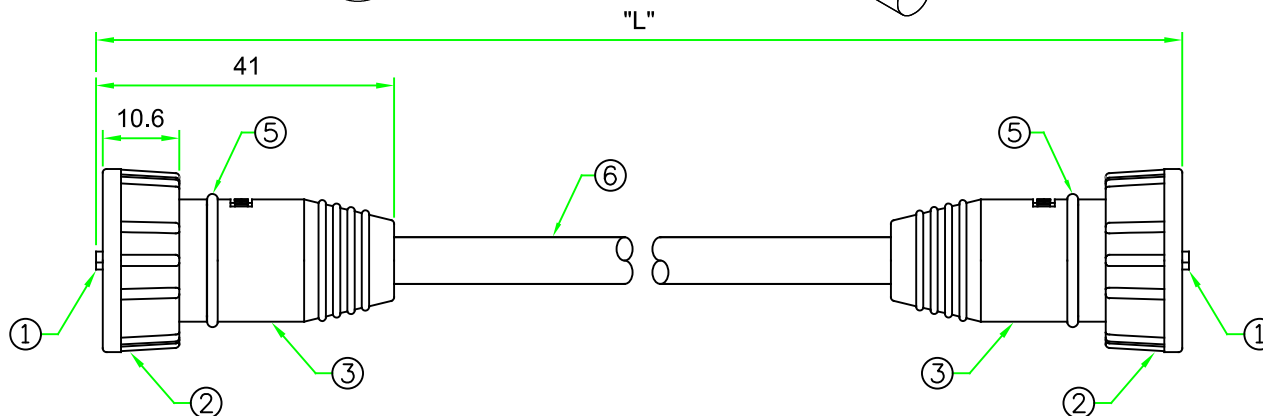

WIRING DIAGRAM △



HDMCC-P4SN△

PIN ASSIGNMENT
FRONT VIEW
(前視圖)

P1	P2	P1	P2
2	2 Red (紅)	11	11 Brown (棕)
3	3 White (白)	12	12 White (白)
1	1 Drain (地線)	10	10 Drain (地線)
5	5 Green (綠)	17	17 Orange (橙)
6	6 White (白)	19	19 White (白)
4	4 Drain (地線)	13	13 Drain (地線)
8	8 Blue (藍)	16	16 Red (紅)
9	9 White (白)	14	14 Orange (橙)
7	7 Drain (地線)	18	18 White (白)
		15	15 Yellow (黃)
		SHELL	SHELL Braid (編織)

P/N △	L
WHDMCC-PA-2M	2000±100
WHDMCC-PA-5M	5000±200

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

UNIT: mm	TITLE: HDMI C Type C Size Screw Type 19P Male Molded Cable
SCALE 1:1	P/N: WHDMCC-PA-xxM △
UNLESS OTHERWISE SPECIFIED TOLERANCES: XX. ±1.0 .X ±1.0 .XX ±0.5 .XXX ±0.25 ANGLE ± 1°	DR. SIBYL CH. JAMES
REV. B SHEET 1/1	DWG.NO: WHDMCC-PA-xxM △ AP.

No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS
6	CABLE	UL20276 (30AWGx1P+AL+D+MY)x5C+(30AWGx4C)+Al+Braid OD:6.5mm	BLACK	1	
5	O-RING	EPDM.	BLACK	2	
4	GASKET	EPDM.	BLACK	2	
3	OVERMOLD	PU.	BLACK	2	
2	SCREW NUT	Nylon+GF.	BLACK	2	
1	CONNECTOR	HDMI C Type 19P Male solder connector. Gold Flash.		2	