




RoHS






RECOMMENDED
PANEL CUT OUT



PIN ASSIGNMENT
FRONT VIEW

(前視圖)

※ Cable specification and length can be customized.

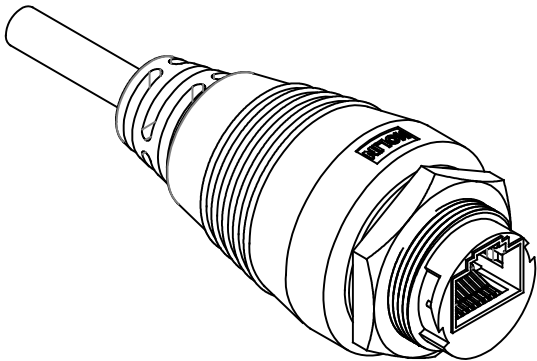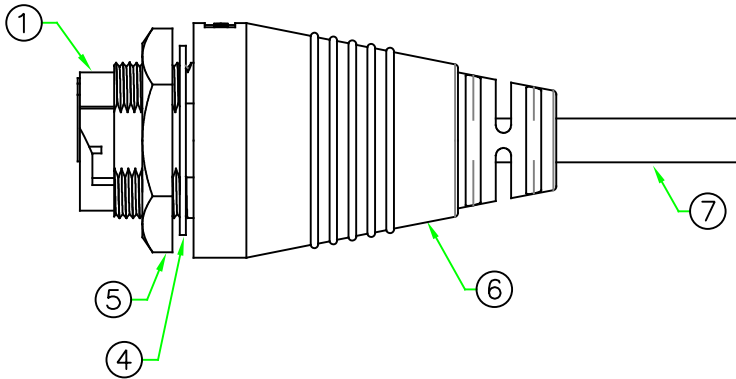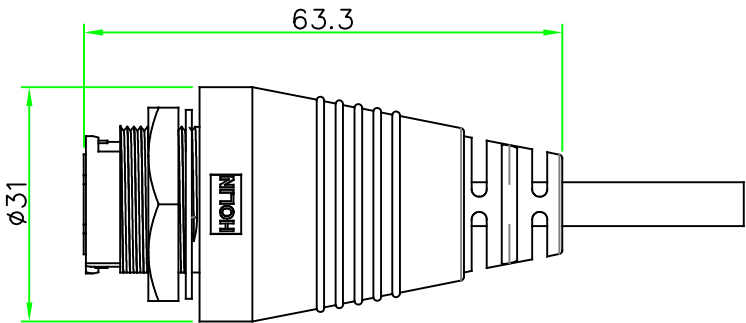

Wiring Diagram

RJ45C-P3CSM

1	Orange/White (橙/白)
2	Orange (橙)
3	Green/White (綠/白)
6	Green (綠)
4	Blue (藍)
5	Blue/White (藍/白)
7	Brown/White (棕/白)
8	Brown (棕)
SHELL	Drain (地線)

7	CABLE	CAT. 5E 24AWG x 4P+D, FTP.	BLACK	1	
6	OVERMOLD	PVC.	BLACK	1	29-135-N10
5	HEX NUT	Nylon+GF.	BLACK	1	
4	GASKET	EPDM.	BLACK	1	
3	GROUND	Ground Contact. SUS304.		2	
2	CONTACT	RJ45 Pin Contact. Phos. Bronze 50u" Gold plating.		8	
1	CONNECTOR	RJ45 Jack Connector Lock Type Body. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司



UNIT: mm

TITLE :

RJ45 Jack C Size Lock Type
Male Connector Female Pin
Molded Cable

SCALE

1:1

UNLESS OTHERWISE
SPECIFIED TOLERANCES:

XX, ±1.0
.X ±1.0 .XX ±0.5
.XXX ±0.25 ANGLE ± 1°

REV.

SHEET

P/N:

RJ45C-L3CSM

DR. SIBYL

CH. JAMES

DWG.NO:

RJ45C-L3CSM

AP.