
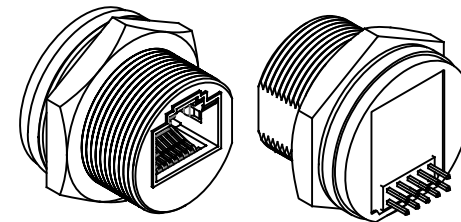
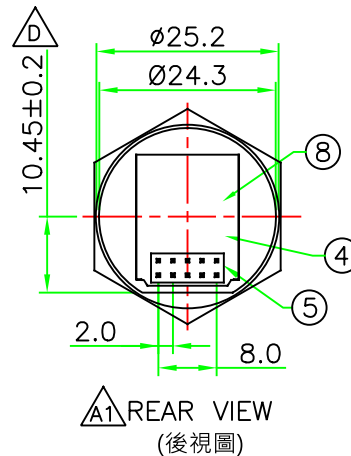
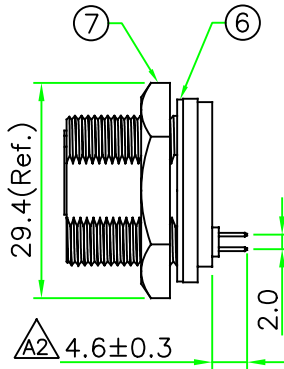

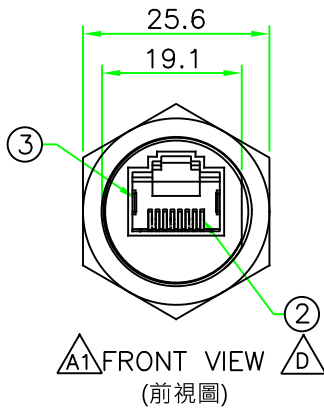




RECOMMENDED
PANEL CUT OUT

RoHS



NOTES:

1. Current Rating: 1A
2. Voltage Rating: 150 VAC Max.
3. Connector Temperature Range: -25°C to 85°C
4. Contact Resistance: ≤30mΩ
5. Insulation Resistance: ≥100MΩ
6. Dielectric Withstanding Voltage:
1KVrms at 60Hz, 1 minute between adjacent contacts.
1.5KVrms at 60Hz, 1 minute between shield and contacts.
7. Panel Thickness Max. 4.0



OLD P/N:RJ45C-PJSSC
(原型號)

8	GLUE	EPOXY.	BLACK			HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司			
7	HEX NUT	NYLON+GF.	BLACK	1		UNIT: mm SCALE 1:1 UNLESS OTHERWISE SPECIFIED TOLERANCES: .XX ± 0.5 .X ± 0.5 .XX ± 0.25 .XXX ± 0.1 ANGLE ± 1° REV. SHEET D 1/1			
6	GASKET	EPDM.	BLACK	1					
5	CONNECTOR	Pin Header, Pitch 2.0mm, 5P*2ROW.	BLACK	1		TITLE RJ45 Jack C Size Panel Connector Screw Type Round Flange Straight Pin Header			
4	PCB	FR4. 4 Layer, 1.0mm Thickness.		1		P/N: RJ45C-P3C01		DR. James	
3	GROUND	Ground Contact. SUS304.		2				CH. Eric	
2	CONTACT	RJ45 PIN Contact. Phos. Bronze 50u" Gold Plating.		8					
1	CONNECTOR	RJ45 JACK Connector Insert. NYLON+GF.	BLACK	1		DWG.NO: RJ45C-P3C01		AP.	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS				