


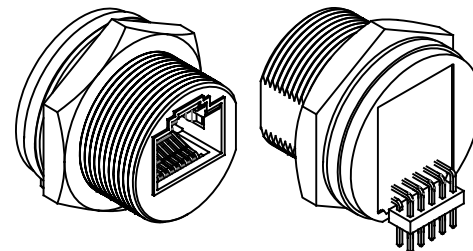
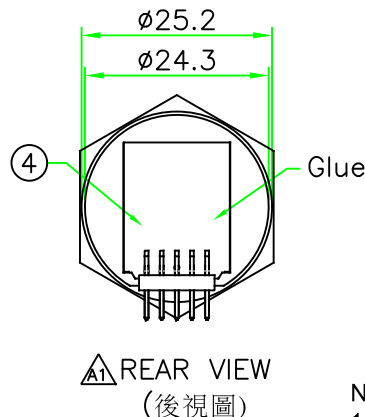

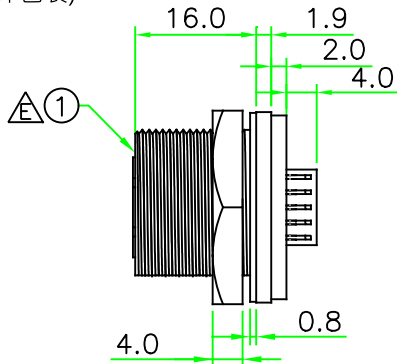
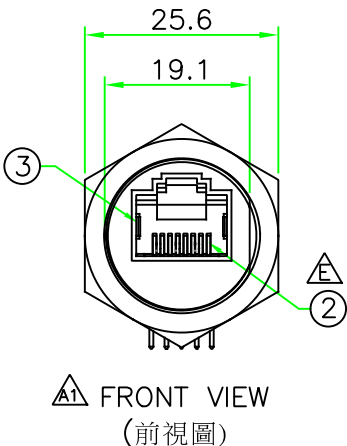


RECOMMENDED
PANEL CUT OUT

RoHS




Pin Assignment
Rear View(後視圖)



PCB Layout

OLD P/N: RJ45C-PJSRC
(原型號)

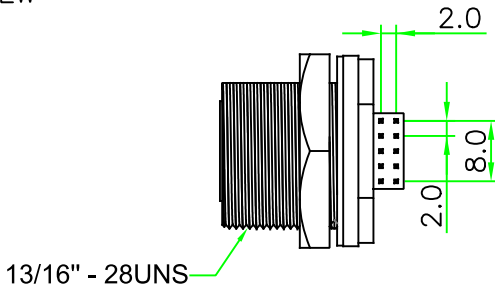

- NOTES:
- Current Rating: 1A
 - Voltage Rating: 150 VAC Max.
 - Connector Temperature Range: -25°C to 85°C
 - Contact Resistance: $\leq 30\text{m}\Omega$
 - Insulation Resistance: $\geq 100\text{M}\Omega$
 - Dielectric Withstanding Voltage:
1KVrms at 60Hz, 1 minute between adjacent contacts.
1.5KVrms at 60Hz, 1 minute between shield and contacts.
 - Panel Thickness Max. 4.0

7	HEX NUT	NYLON+GF.	BLACK	1	
6	GASKET	EPDM.	BLACK	1	
5	CONNECTOR	R/A Pin Header, Pitch 2.0mm, 5P*2ROW.	NATURE	1	
4	PCB	FR4. 4 Layer, 1.0mm Thickness.		1	
3	GROUND	Ground Contact. SUS304.		2	
2	CONTACT	RJ45 PIN Contact. Phos. Bronze 50u" Gold Plating.		8	
1	CONNECTOR	RJ45 JACK Connector Insert. NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

REV.	DESCRIPTION	DATE
A	ISSUE	May/11/2014
A1	Add Note	Dec/11/2014
B	Add Electrical Data & Change design.	Feb/02/2016
C	Modify connector insert.	Sep/21/2016
D	Change connector insert.	Jul/18/2024
E	Change RJ45 Jack & Housing & PCB.	Mar/07/2025

HOLIN®		HTP ASIA TECHNOLOGY CO., LTD.	
禾凌科技股份有限公司			
	UNIT: mm	TITLE RJ45 JACK C Size Panel Connector Screw Type Round Flange 10P Right Angle Pin Header	
SCALE	1:1		
UNLESS OTHERWISE SPECIFIED TOLERANCES: XX, ± 0.5 .X ± 0.5 .XX ± 0.25 .XXX± 0.1 ANGLE ± 1°		P/N: RJ45C-P3C02	DR. JAMES
			CH. ERIC
REV. E	SHEET 1/1	DWG.NO: RJ45C-P3C02	AP.