



RECOMMENDED
PANEL CUT OUT

RoHS





Pin Assignment
Front View(前視圖)




Pin Assignment
Rear View(後視圖)


Note: Hex nut & gasket are not assembled separately packaged
(Hex nut & gasket不組裝另外包裝)

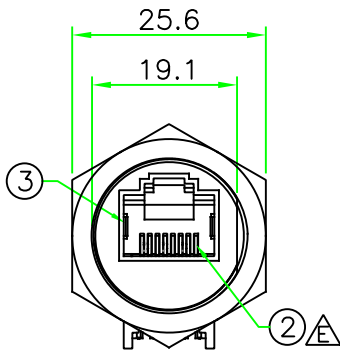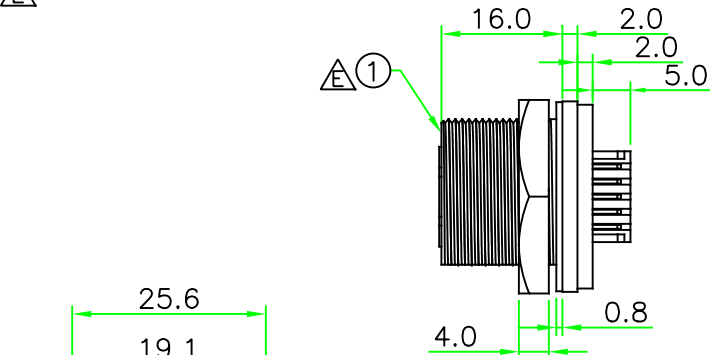


FRONT VIEW
(前視圖)



13/16" - 28UNS

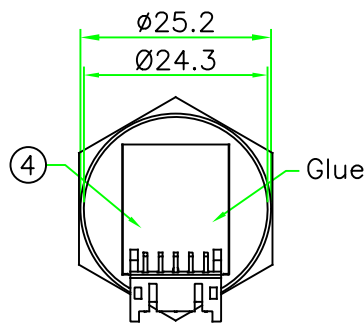

REAR VIEW
(後視圖)

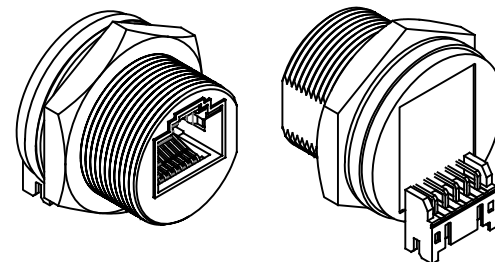

NOTES:

1. Current Rating: 1A
2. Voltage Rating: 150 VAC Max.
3. Connector Temperature Range: -25°C to 85°C
4. Contact Resistance: $\leq 30m\Omega$
5. Insulation Resistance: $\geq 100M\Omega$
6. Dielectric Withstanding Voltage:
1KVrms at 60Hz, 1 minute between adjacent contacts.
1.5KVrms at 60Hz, 1 minute between shield and contacts.
7. Panel Thickness Max. 4.0

7	HEX NUT	NYLON+GF.	BLACK	1	
6	GASKET	EPDM.	BLACK	1	
5	CONNECTOR	Right Angle Wafer, Pitch 2.0mm, 5P*2ROW.	NATURE	1	
4	PCB	FR4. 4 Layer, 1.0mm Thickness.		1	
3	GROUND	Ground Contact. SUS304.		2	
2	CONTACT	RJ45 PIN Contact. Phos. Bronze 50u" Gold Plating.		8	
1	CONNECTOR	RJ45 JACK Connector Insert. NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
	UNIT: mm	TITLE RJ45 JACK C Size Panel Connector Screw & Round Flange Type Right Angle Wafer			
	SCALE 1:1				
UNLESS OTHERWISE SPECIFIED TOLERANCES: .XX ± 0.5 .X ± 0.5 .XX ± 0.25 .XXX ± 0.1 ANGLE ± 1°		P/N: RJ45C-P3C04		DR. JAMES	
REV. E		SHEET 1/1		CH. ERIC	
		DWG.NO: RJ45C-P3C04		AP.	