


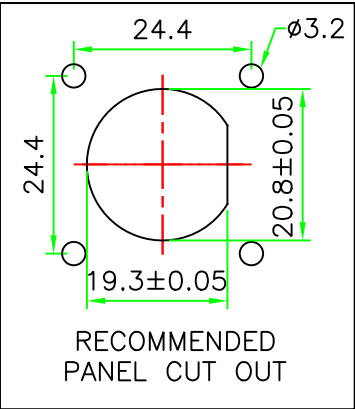


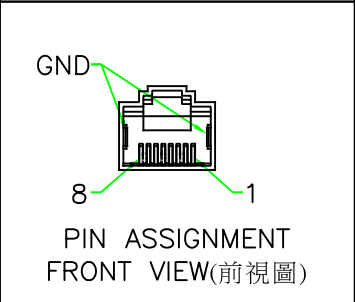


RoHS

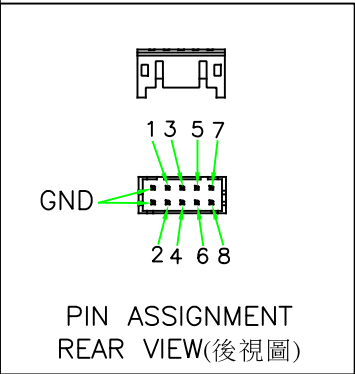

Note: Hex nut & gasket are not assembled separately packaged
⚠ (Hex nut & gasket不組裝另外包裝)

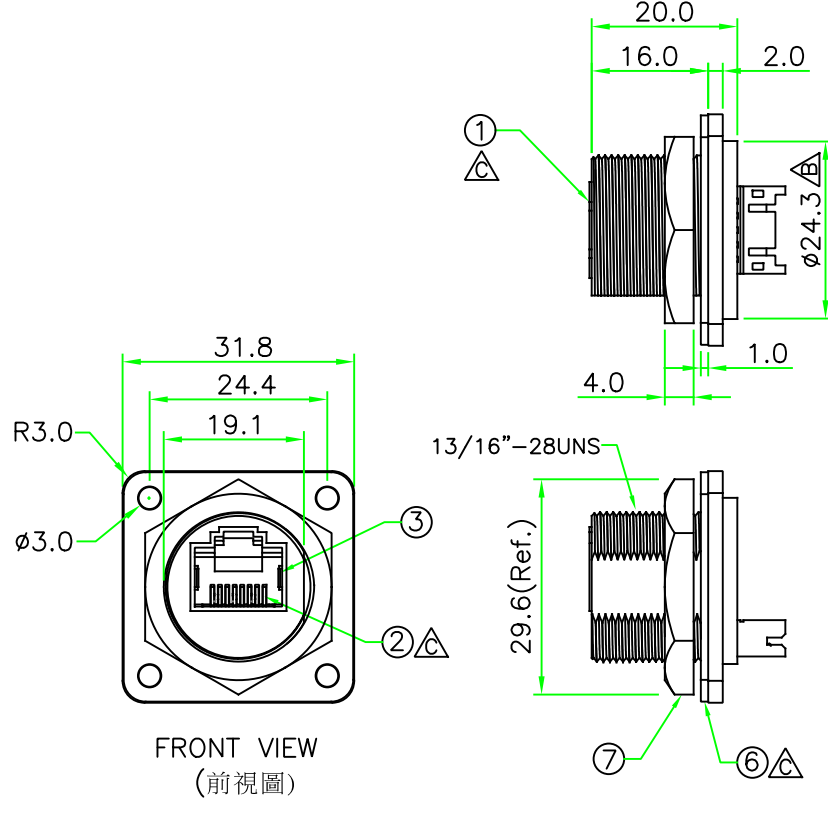

REV.	DESCRIPTION	DATE
A	ISSUE	APR/14/2017
B	Change design.(EC-108030膠芯設變)	Nov/20/2019
C	Change RJ45 Jack,gasket,PCB & insert.	Mar/11/2025

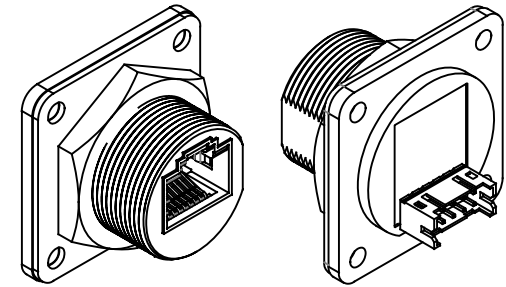

- ⚠NOTES:
1. Current Rating: 1A
 2. Voltage Rating: 150 VAC Max.
 3. Connector Temperature Range: -25°C to 85°C
 4. Contact Resistance: ≤30mΩ
 5. Insulation Resistance: ≥100MΩ
 6. Dielectric Withstanding Voltage:
1KVrms at 60Hz, 1 minute between adjacent contacts.
1.5KVrms at 60Hz, 1 minute between shield and contacts.
 7. Panel Thickness Max. 4.0

8	GLUE	Epoxy.	BLACK		
7	HEX NUT	Nylon+GF.	BLACK	1	
6	GASKET ⚠	EPDM.	BLACK	1	
5	WAFER	Pitch 2.0mm 5 PIN x 2 Row, Straight Wafer.	WHITE	1	
4	PCB ⚠	FR4. 4 Layer, 1.0mm Thickness.		1	
3	GROUND	Ground Contact. SUS304.		2	
2	CONTACT ⚠	RJ45 Pin Contact. Phos. Bronze 50u" Gold Plating.		1	
1	CONNECTOR	RJ45 Jack Connector Body. Nylon+GF. ⚠	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
UNIT: mm		TITLE RJ45 JACK C Size Panel Connector Rear Mount Screw Type Square Flange With Straight Angle Wafer			
SCALE 1:1		P/N: RJ45C-P3Q03		DR. James	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .XX ± 0.5 .X ± 0.5 .XX ± 0.25 .XXX ± 0.1 ANGLE ± 1°		DWG.NO: RJ45C-P3Q03		CH. Eric	
REV. C	SHEET 1/1			AP.	