


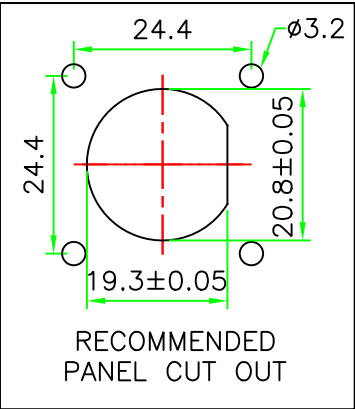
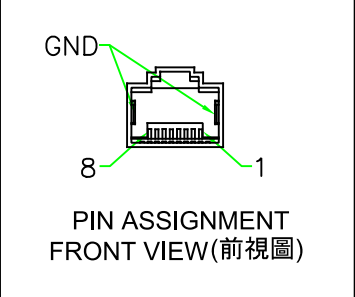
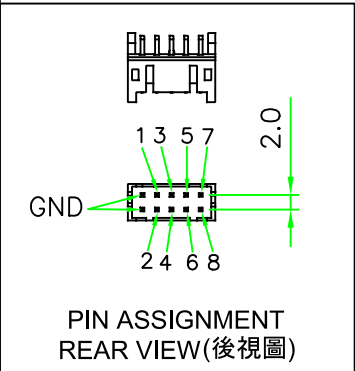


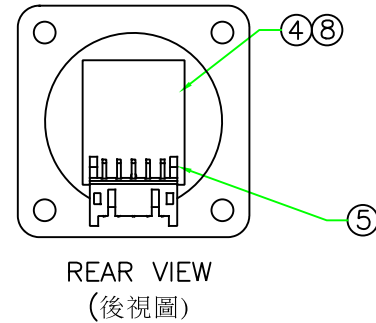


RoHS

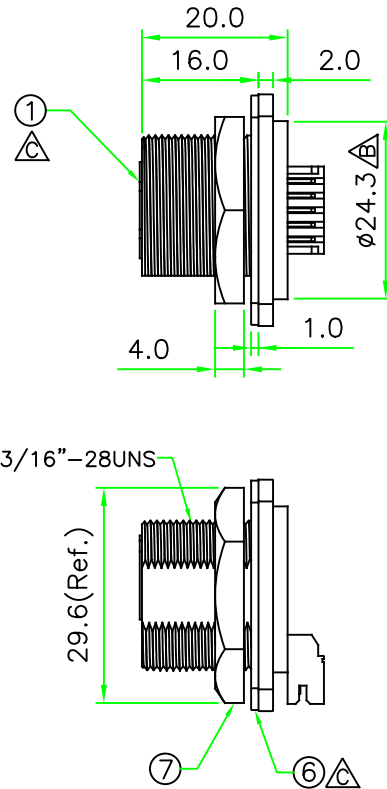

Note: Hex nut & gasket are not assembled separately packaged
△ (Hex nut & gasket不組裝另外包裝)

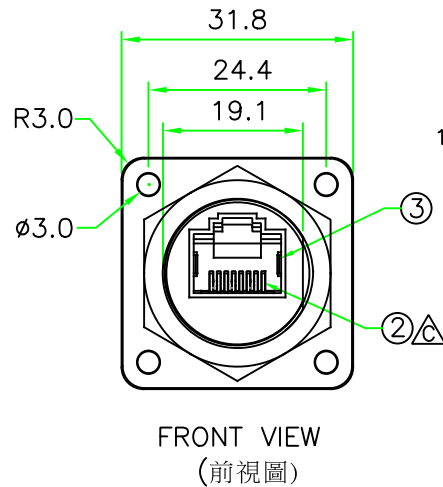

REV.	DESCRIPTION	DATE
A	ISSUE	APR/14/2017
B	Change design.(EC-108030膠芯設變)	Nov/20/2019
C	Change RJ45 Jack,gasket,PCB & insert.	Mar/11/2025

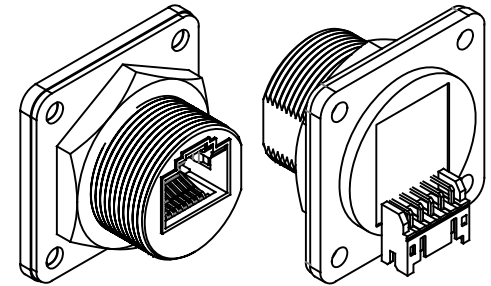

- △NOTES:
1. Current Rating: 1A
 2. Voltage Rating: 150 VAC Max.
 3. Connector Temperature Range: -25°C to 85°C
 4. Contact Resistance: ≤30mΩ
 5. Insulation Resistance: ≥100MΩ
 6. Dielectric Withstanding Voltage:
1KVrms at 60Hz, 1 minute between adjacent contacts.
1.5KVrms at 60Hz, 1 minute between shield and contacts.
 7. Panel Thickness Max. 4.0

8	GLUE	Epoxy.	BLACK			HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司			
7	HEX NUT	Nylon+GF.	BLACK	1		UNIT: mm SCALE 1:1	TITLE RJ45 JACK C Size Panel Connector Rear Mount Screw Type Square Flange With Right Angle Wafer		
6	GASKET △	EPDM.	BLACK	1					
5	WAFER	Right Angle Wafer, Pitch 2.0mm, 5Px2Row.	WHITE	1		UNLESS OTHERWISE SPECIFIED TOLERANCES: .XX ± 0.5 .X ± 0.5 .XX ± 0.25 .XXX ± 0.1 ANGLE ± 1°	P/N: RJ45C-P3Q04		
4	PCB △	FR4. 4 Layer, 1.0mm Thickness.		1					
3	GROUND	Ground Contact. SUS304.		2					
2	CONTACT △	RJ45 Pin Contact, Phos, Bronze 50u" Gold Plating.		1		REV. C	DWG.NO: RJ45C-P3Q04		
1	CONNECTOR	RJ45 Jack Connector Body. Nylon+GF. △	BLACK	1					
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS				