

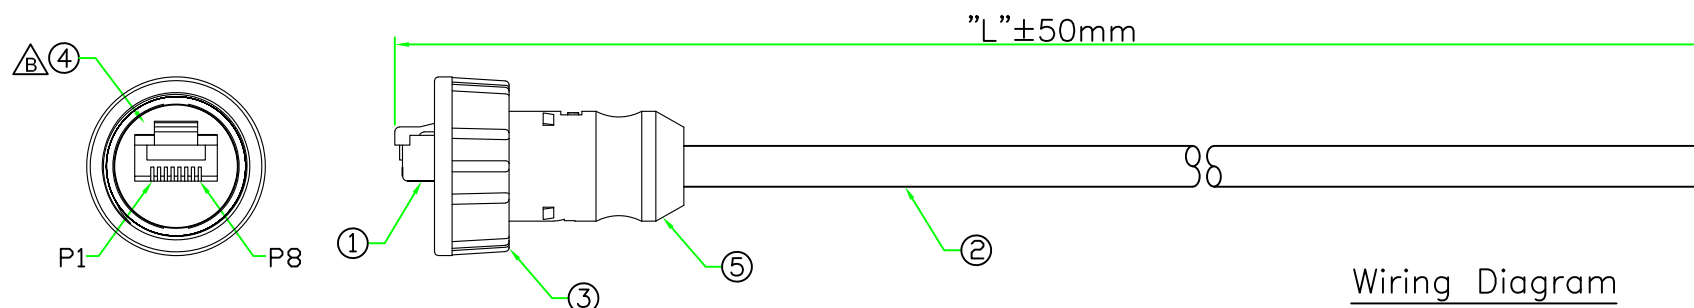
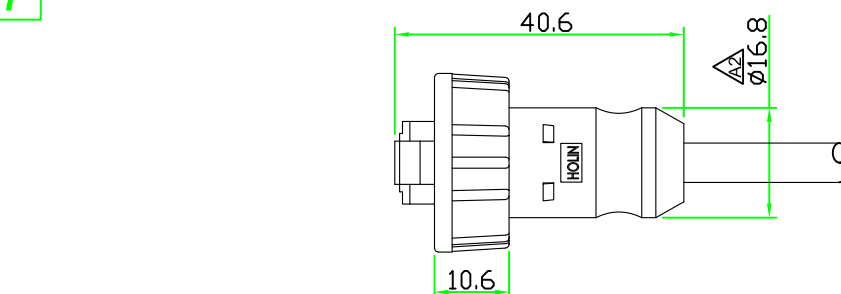


IP67

A technical line drawing of a cable connector assembly. The assembly consists of a cable jacket, a braided shield, and an inner conductor. A green arrow points to the cable jacket, indicating the location for the first step of the stripping process.

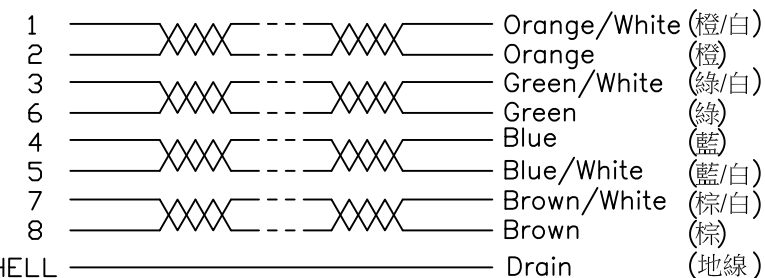

RJ45 PLUG

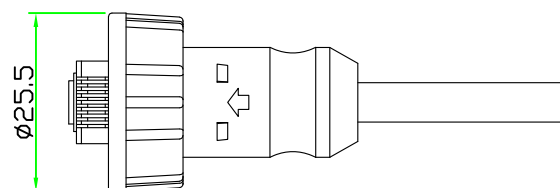

5	OVER MOLDED	PVC	BLACK	1	
4	GASKET 	NBR.	BLACK	1	GSL-1815-NK0
3	SCREW NUT	NYLON+GF.	BLACK	1	
2	CABLE	CAT. 5E 24AWG x 4P, FTP, OD: 5.8mm.	BLACK	1	
1	PLUG	RJ-45 8P8C Shielded Plug. 3u" Gold Plated. 		1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

 HWP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司			
 UNIT: mm		TITLE : RJ45 Plug C Size Screw Type Molded Cable	
SCALE 1:1		P/N: RJ45C-P4SN-xxM	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .X ± 0.25 .XX ± 0.1 .XXX ± 0.05 ANGLE ± 1°		DR. James CH. ERIC	
REV. B	SHEET 1/1	DWG.NO: RJ45C-P4SN-xxM	AP.