


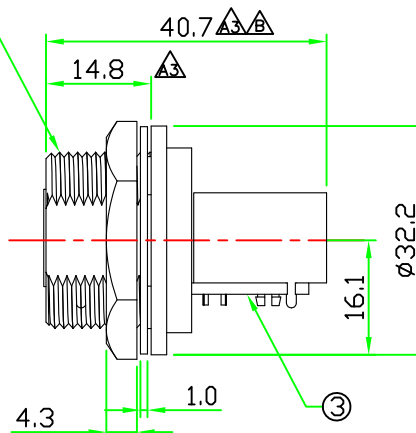
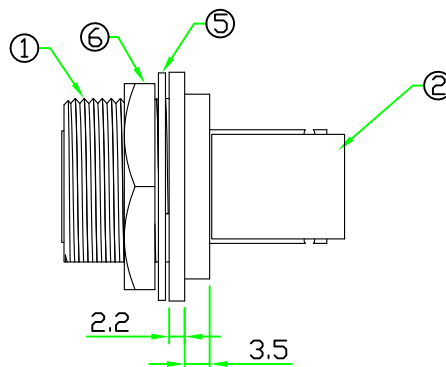


RECOMMENDED
PANEL CUT OUT

RoHS
IP66~68

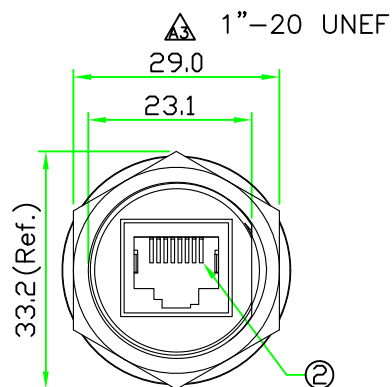


PIN ASSIGNMENT
FRONT VIEW
(前視圖)

原型號為:RJ45D-PJCRJ
(OLD NO.)

No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS
6	HEX NUT	NYLON+GF.	BLACK	1	
5	GASKET	EPDM.	BLACK	1	
4	GLUE	EPOXY.	BLACK	1	
3	PCB	FR4, 4 Layers. 1.6mm Thickness. Δ		1	
2	RJ45 JACK	RJ45 Jack with Shield. Right Angle Type. Δ		2	
1	CONNECTOR	RJ45 Jack Connector Insert. NYLON+GF.	BLACK	1	

REV	DESCRIPTION	DATE
A	ISSUE	Mar/07/2014
A1	Add Pin assignment	Aug/27/2015
A2	Add Electrical Characteristics	Dec/08/2015
A3	Modify dimension.	Jan/20/2016
B	Change RJ45 Jack & PCB.	Dec/01/2016

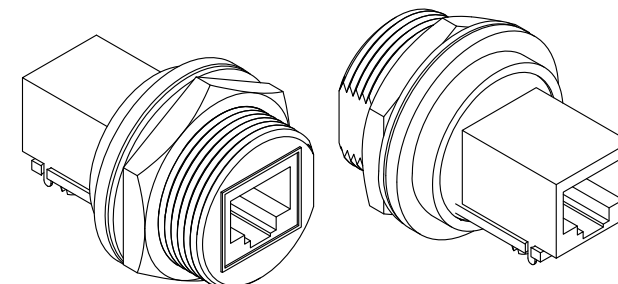

NOTES:

1. Current Rating: 1A
2. Voltage Rating: 150 VAC Max.
3. Connector Temperature Range: -25°C to 85°C
4. Contact Resistance: $\leq 30m\Omega$
5. Insulation Resistance: $\geq 100M\Omega$
6. Dielectric Withstanding Voltage:
1KVrms at 60Hz, 1 minute between adjacent contacts.
1.5KVrms at 60Hz, 1 minute between shield and contacts.
7. Panel Thickness Max. 4.0

HOLIN [®] HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
	UNIT: mm	TITLE : RJ45 JACK D Size Panel Connector Rear Mount Screw Type Round Flange With Right Angle RJ45 Shield Jack			
SCALE	1:1				
UNLESS OTHERWISE SPECIFIED TOLERANCES:		P/N: RJ45D-P3CSJ		DR. Patty	
X ±0.5 XX ±0.25				CH. ERIC	
XXX ±0.1 ANGLE ± 1°					
REV.	SHEET	DWG.NO: RJ45D-P3CSJ		AP.	
B	1/1				