


RECOMMENDED  
PANEL CUT OUT




RoHS

IP66



PIN ASSIGNMENT  
FRONT VIEW  
(前視圖)

OLD P/N:USB2AC-L3CSJ  
(原型號)

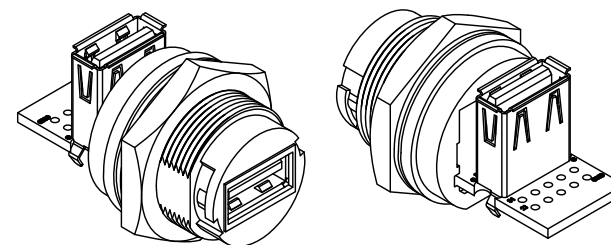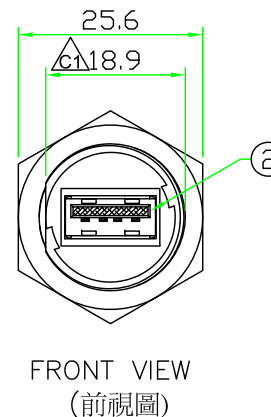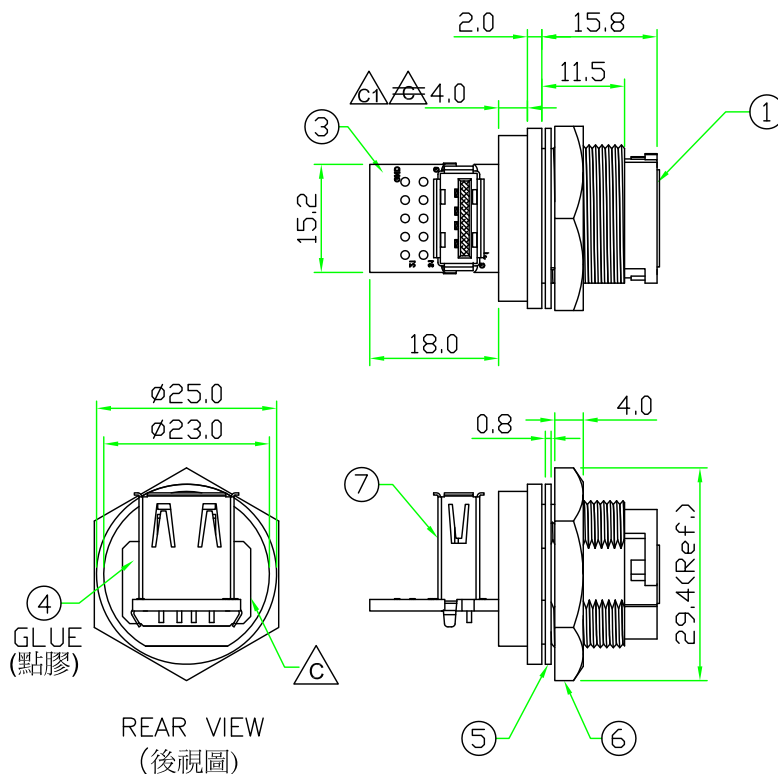

NOTES:

1. Current Rating: 1A
2. Connector Temperature Range: -25°C to 85°C
3. Contact Resistance:  $\leq 30\text{m}\Omega$
4. Insulation Resistance:  $\geq 100\text{M}\Omega$
5. Breakdown Voltage:  $\geq \text{AC } 500\text{V}/1 \text{ Minute}$
6. Panel Thickness Max. 6.0 mm

|     |           |                                             |       |      |         |
|-----|-----------|---------------------------------------------|-------|------|---------|
| 7   | CONNECTOR | USB 2.0 A Type Female Straight PCB Type.    |       | 1    |         |
| 6   | HEX NUT   | NYLON+GF.                                   | BLACK | 1    |         |
| 5   | GASKET    | EPDM.                                       | BLACK | 1    |         |
| 4   | GLUE      | EPOXY.                                      | BLACK | 1    |         |
| 3   | PCB       | FR4. Double Size, 1.6mm Thickness           |       | 1    |         |
| 2   | CONNECTOR | USB 2.0 A Type Female Connector.            | WHITE | 1    |         |
| 1   | BODY      | USB A Type Female Connector Body. NYLON+GF. | BLACK | 1    |         |
| No. | PART NAME | DESCRIPTION                                 | COLOR | Q'TY | REMARKS |

|                                                                                        |       |          |                                                                                                                |     |       |
|----------------------------------------------------------------------------------------|-------|----------|----------------------------------------------------------------------------------------------------------------|-----|-------|
| HOLIN® HTP ASIA TECHNOLOGY CO., LTD.<br>禾凌科技股份有限公司                                     |       |          |                                                                                                                |     |       |
|                                                                                        |       | UNIT: mm | TITLE : USB 2.0 A Type Female C Size<br>Lock Type Circular Flange Panel<br>With Straight USB 2.0 A Type Female |     |       |
| SCALE                                                                                  |       | 1:1      |                                                                                                                |     |       |
| UNLESS OTHERWISE SPECIFIED TOLERANCES:<br>.X ± 0.5 .XX ± 0.25<br>.XXX ± 0.1 ANGLE ± 1° |       |          | P/N:                                                                                                           | DR. | Patty |
|                                                                                        |       |          |                                                                                                                | CH. | ERIC  |
| REV.                                                                                   | SHEET | DWG.NO:  | AP.                                                                                                            |     |       |
| C1                                                                                     | 1/1   |          | USB2AC-L3CRJ                                                                                                   |     |       |