






PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF HTP ASIA TECHNOLOGY CO., LTD. .
ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF HTP ASIA TECHNOLOGY CO., LTD. IS PROHIBITED.

REV	DESCRIPTION	DATE
A	ISSUE	NOV/05/2008
A1	Correct P/N	APR/30/2013

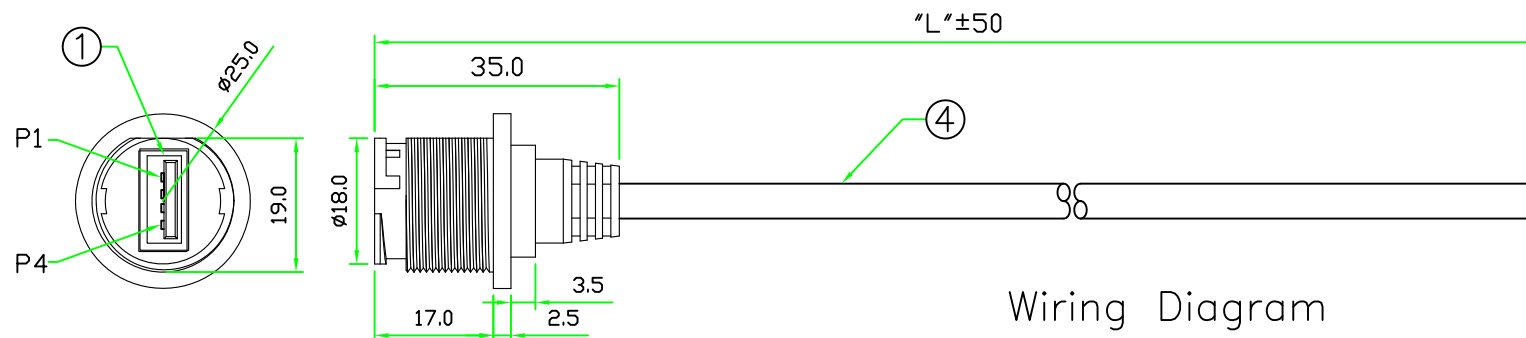

Wiring Diagram

1	RED(24AWG)	紅
2	WHITE(28AWG)	白
3	GREEN(28AWG)	綠
4	BLACK(24AWG)	黑
SHELL	DRAIN	地線

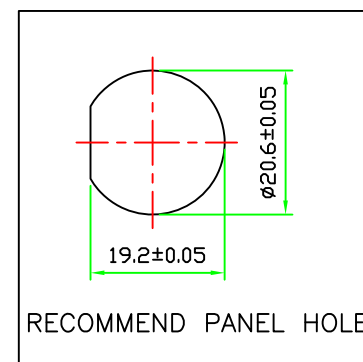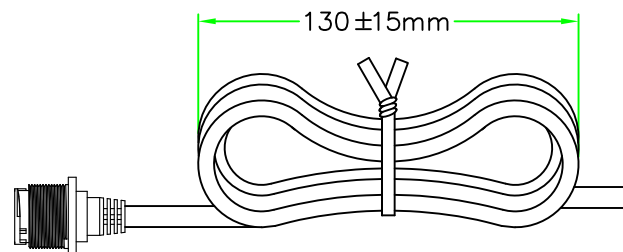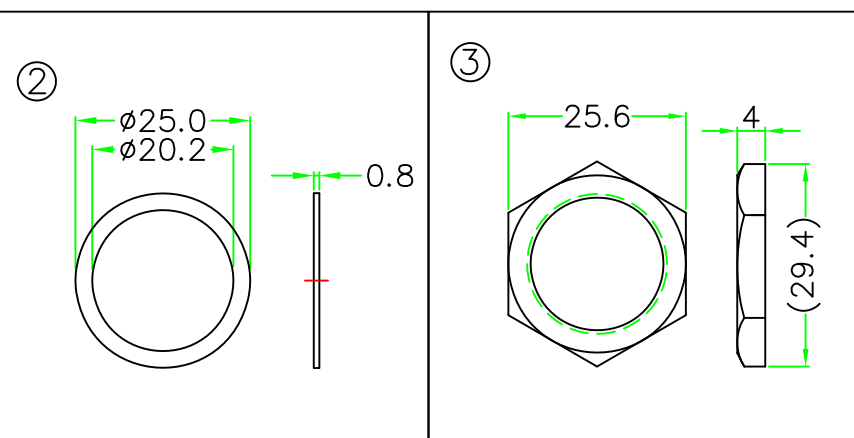

4	CABLE	28AWGx1P+24AWGx2C+AL/MYLAR+DRAIN+BRAID. OD:5.0mm.	BLACK	1	
3	HEX NUT	NYLON+GF.	BLACK	1	42-135
2	GASKET	EPDM.	BLACK	1	84-135
1	CONNECTOR	USB A 2.0 TYPE FEMALE CONNECTOR.	WHITE	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN		HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司	
	UNIT:mm	TITLE : USB A 2.0 TYPE FEMALE PANEL LOCK & CIRCULAR FLANGE TYPE CABLE MOLDED	
SCALE	1:1		
UNLESS OTHERWISE SPECIFIED TOLERANCES: × ±0.25 ×× ± 0.1 ××× ± 0.05 ANGLE ± 1°		P/N: USB2AC-L3CSM-xxM 	DR. <i>Jack</i>
			CH. <i>Michael</i>
REV. A1	SHEET 1/1	DWG.NO: USB2AC-L3CSM-xxM	AP.