



PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF HTP ASIA TECHNOLOGY CO., LTD. .
ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF HTP ASIA TECHNOLOGY CO., LTD. IS PROHIBITED.

RoHS


IP66~68





RECOMMENDED
PANEL CUT OUT





PIN ASSIGNMENT
FRONT VIEW(前視圖)




PIN ASSIGNMENT
REAR VIEW(後視圖)

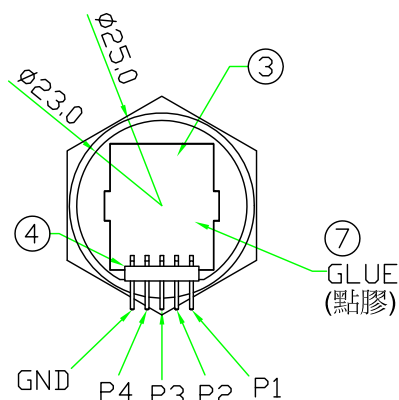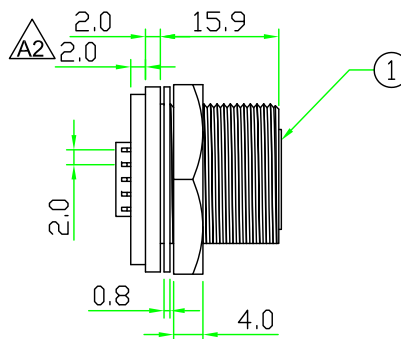

REAR VIEW
(後視圖)

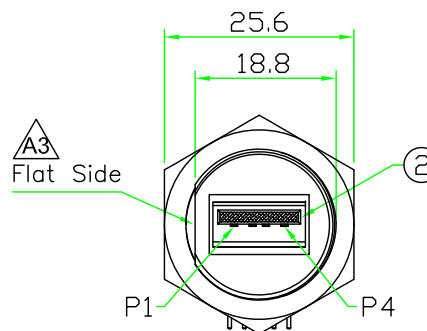

FRONT VIEW
(前視圖)

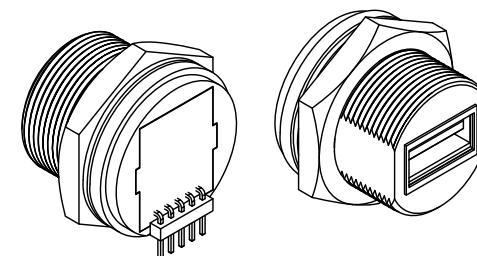

NOTES:

1. Current Rating: 1A
2. Connector Temperature Range: -25°C to 85°C
3. Contact Resistance: $\leq 30\text{m}\Omega$
4. Insulation Resistance: $\geq 100\text{M}\Omega$
5. Breakdown Voltage: $\geq \text{AC } 500\text{V}/1 \text{ Minute}$

7	GLUE	EPOXY.	BLACK		
6	HEX NUT	NYLON+GF.	BLACK	1	
5	GASKET	EPDM.	BLACK	1	
4	PIN HEADER	PITCH 2.0mm, Right Angle. 5P*1ROW.	BLACK	1	
3	PCB	FR4 . Double Side, 1.0mm Thickness.		1	
2	CONNECTOR	USB A Type Female Connector.		1	
1	BODY	USB A Type Female Connector Body. NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
UNIT: mm		TITLE : USB 2.0 A Type Female C Size Screw Type Circular Flange Panel 5 Pin Right Angle Pin Header			
SCALE 1:1		P/N: USB2AC-P3C02		DR. Patty	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .X ± 0.25 .XX ± 0.1 .XXX ± 0.05 ANGLE ± 1°		DWG.NO: USB2AC-P3C02		CH. ERIC	
REV. A3	SHEET 1/1				